

# WA VBF

priključek ... VBF, temprana litina

**HANSA FLEX**

## Lastnosti

**Območje uporabe** Priključna armatura za kovinske cevi

**Priključek 1** cilindrični colski notranji navoj


**Oblika tesnila 1** ploščato tesnenje

**Standard** DIN EN 10226 / ISO 7-1

**Oblika izdelave** ravno

**Uporaba** lotana izvedba, obstojna do 200 °C

**Material:** temprana litina

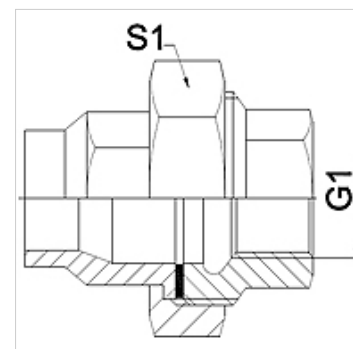

## Navodilo

Navedene so orientacijske vrednosti!

The specified working pressure PN(bar) relates to the working temperature of -20 °C to 120 °C. At working temperature of 120 °C to 200 °C the working pressure PN (bar) reduces to 22,7 bar.

## Navodila za naročanje

Druge izvedbe na zahtevo

## Artikel

Opis	DN	PN (bar)	G1	S1 (mm)
WA 006 VBF	6	25	Rp 1/4"	28,0
WA 010 VBF	10	25	Rp 3/8"	32,0
WA 013 VBF	13	25	Rp 1/2"	39,0
WA 020 VBF	20	25	Rp 3/4"	48,0
WA 025 VBF	25	25	Rp 1"	55,0
WA 032 VBF	32	25	Rp 1.1/4"	67,0
WA 040 VBF	40	25	Rp 1.1/2"	74,0
WA 050 VBF	50	25	Rp 2"	90,0
WA 065 VBF	65	25	Rp 2.1/2"	111,0
WA 080 VBF	80	25	Rp 3"	130,0

## Variante izdelka

**WA VBF RG** priključek ... VBF, rdeča litina, Rdeča litina

**WA VBF VA** priključek ... VBF, VA, nerjavno jeklo