

# WA VCF

priključek ... VCF, temprana litina

**HANSA FLEX**

## Lastnosti

**Območje uporabe** Priključna armatura za kovinske cevi

**Priključek 1** konični colski zunanji navoj

**Oblika tesnila 1** ploščato tesnenje


**Standard** DIN EN 10226 / ISO 7-1

**Uporaba** lotana izvedba, obstojna do 200 °C

**Oblika izdelave** ravno

**Izvedba** 3-delni navoj

**Material:** temprana litina

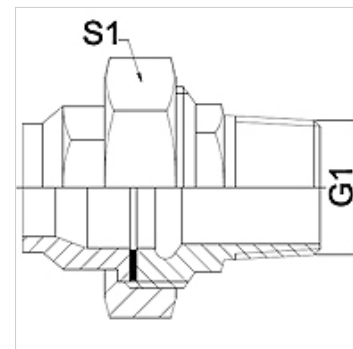

## Navodilo

Navedene so orientacijske vrednosti!

The specified working pressure PN(bar) relates to the working temperature of -20 °C to 120 °C. At working temperature of 120 °C to 200 °C the working pressure PN (bar) reduces to 22,7 bar.

## Navodila za naročanje

Druge izvedbe na zahtevo

## Artikel

Opis	DN	PN (bar)	G1	S1 (mm)
WA 006 VCF	6	25	R 1/4"	28,0
WA 013 VCF	13	25	R 1/2"	39,0
WA 020 VCF	20	25	R 3/4"	48,0
WA 025 VCF	25	25	R 1"	55,0
WA 032 VCF	32	25	R 1.1/4"	67,0
WA 040 VCF	40	25	R 1.1/2"	74,0
WA 050 VCF	50	25	R 2"	90,0

## Variante izdelka

**WA VCF RG** priključek ... VCF, rdeča litina, Rdeča litina

**WA VCF VA** priključek ... VCF, VA, nerjavno jeklo