


WFG (6000 PSI)

Adapter za spojko SAE, kovani

Lastnosti

Tlačna vrsta	6000 psi
Standard	DIN 3901 / 3902
Način izdelave-dodatek	kovano
Oblika izdelave	koleno 90°
Način izdelave	adapter SAE-prirobnica
Obseg dobave	samo prirobnica
Material:	S355J2G3 (ST52.3)
Zaščita površine	galvanično prevlečeno

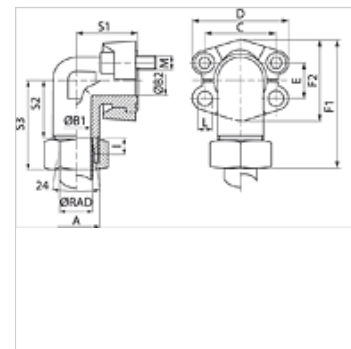

Navodilo

Navedeni najvišji obratovalni tlak velja za prirobnico! Dejanski obratovalni tlak se določa na osnovi cevi (debeline stene) in na osnovi kvalitete cevi!

Priporočeni vijaki so navedeni v stolpcih M (metr) ali M (unc).

Artikel

Opis	Serijska	Ø RAD (mm)	PB 10.9 (bar)	Velikost	A	B1 (mm)	B2 (mm)	F1 (mm)	l (mm)	S1 (mm)	S2 (mm)	S3 (mm)	L (mm)	M metr.
WFG 6001/S 16	S	16	400	1/2"	M24x1,5	12	12	71,6	8,5	39	29,4	48	8,7	M 8 x 30
WFG 6002/S 16	S	16	400	3/4"	M24x1,5	12	17	85,0	8,5	48	36,5	55	10,7	M 10 x 35
WFG 6002/S 20	S	20	400	3/4"	M30x2	16	17	87,0	10,5	48	35,5	57	10,7	M 10 x 35
WFG 6002/S 25	S	25	400	3/4"	M36x2	17	17	90,0	12,0	48	36,0	60	10,7	M 10 x 35
WFG 6003/S 25	S	25	400	1"	M36x2	20	24	99,8	12,0	60	41,0	65	13,0	M 12 x 45
WFG 6003/S 30	S	30	400	1"	M42x2	24	24	102,9	13,5	60	41,5	68	13,0	M 12 x 45
WFG 6004/S 30	S	30	400	1.1/4"	M42x2	25	31	109,6	13,5	68	44,5	71	14,7	M 14 x 50
WFG 6004/S 38	S	38	350	1.1/4"	M52x2	28	31	114,6	16,0	68	45,0	76	14,7	M 14 x 50
WFG 6005/S 38	S	38	350	1.1/2"	M52x2	30	36	134,5	16,0	76	56,0	87	17,0	M 16 x 55

serija: LL = zelo lahko L = lahko S = težko -- PN = nazivni tlak PB = maks. obratovalni tlak -- Ø RAD = zunanji premer cevi

Variante izdelka

WFG M (3000 / 6000 PSI) Adapter za spojko SAE, kovani, z 2 polprirobnicama, kompletom vijakov in O-tesnilom