

FI RL E HY

filtrirni element za filter povratnega toka HY

HANSA FLEX


Lastnosti

Temperatura min. -25 °C

Temperatura max. 120 °C

Material: Tesnilo: NBR

Obratovalni tlak maks. 20 bar

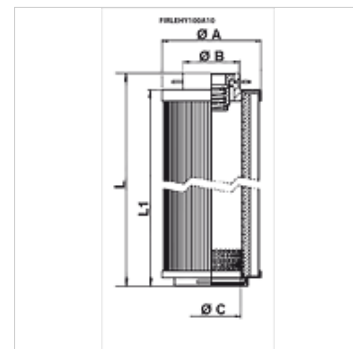

Artikel

| Opis | Filtrska enota (μ m) | Površina filtra (cm ²) | Filter material | Ø A (mm) | Ø B (mm) | Ø C (mm) | L (mm) | L1 (mm) | Teža (kg) |
|---------------------|------------------------------|---------------------------------------|-----------------|-------------|-------------|-------------|-----------|------------|--------------|
| FI RL E HY 0100 A10 | 10,0 | 8785 | anorgansko | 114,0 | 68,3 | 65,0 | 331,00 | 312,50 | 2,44 |
| FI RL E HY 0050 A16 | 16,0 | 610 | anorgansko | 51,5 | 24,0 | 22,0 | 102,50 | 91,50 | 0,23 |