


FI SP E E

Filter element for spin-on filter E

HANSA FLEX

Lastnosti

| | |
|---------------------|---|
| Posebne značilnosti | Δp maks. 4 bar |
| Temperatura min. | -25 °C |
| Temperatura max. | 120 °C |
| Material: | Tesnilo: NBR |
| Obratovalni tlak | maks. 12 bar |
| uporaba | For spin-on filters FI SP R 1, FI SP R 2, FI SP R 3 |

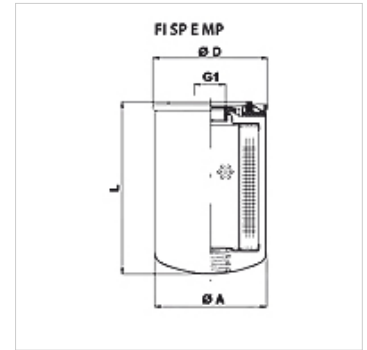

Artikel

| Opis | Filtrska enota (μm) | Površina filtra (cm^2) | Qmaks (L/min) | Filter material | za tip filtra | G1 | Ø A (mm) | Ø D (mm) | L (mm) | Teža (kg) |
|--------------------|-------------------------------|-------------------------------|------------------|-----------------|----------------|--------|-------------|-------------|-----------|--------------|
| FI SP E E 0050 P25 | 10,0 | 2419 | 100 | organic | FI SP R 53, 58 | G 3/4" | 95,0 | 96,0 | 147,0 | 0,40 |

Qmax - maks. volumnski pretok

Pribor

FI SP R/S FK filtrska glava za navojni filter povratnega toka / sesalni filter

je nadomestni del za naslednje izdelke

| | |
|-----------|--------------------------------------|
| FI SP R 1 | navojni filter povratnega toka tip 1 |
| FI SP R 2 | navojni filter povratnega toka tip 2 |
| FI SP R 3 | navojni filter povratnega toka tip 3 |