


Lastnosti

| | |
|-------------------------|---|
| Izvedba | z obvodnim ventilom 1,75 bar, brez prikaza onesaženosti |
| Temperatura min. | -25 °C |
| Temperatura max. | 110 °C |
| Material: | Tesnilo: NBR |
| Obratovalni tlak | maks. 8 bar |
| Obseg dobave | vklij. s filtrirnim elementom |

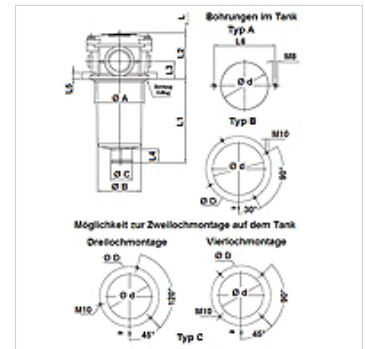

Navodilo

Mera "L": potreben prosti prostor za zamenjavo filtrirnega elementa

Opis

Filter povratnega toka za vgradnjo v pokrov posode, mere za izvrtino so prikazane na sliki.

Tlačna razlika za papirnati filtrirni element (P) maks. 3 bar

Tlačna razlika za anorganski filtrirni element (A) maks. 10 bar

Connector for clogging indicator G 1/8" closed with bolt

Zasnova (Qmaks.) za medij ISO VG 46 pri 50 °C (30 mm²/s) in Δpsk = 0,4 bar

Artikel

| Opis | Prikluček za vodovod | Ø A | Ø B | Ø C | Ø D | Ø d | Q max. | L | L1 | L2 | L3 | L4 | L5 | L6 | Tip | Teža (kg) |
|-------------------------|----------------------|-------|-------|------|-------|-------|---------|-------|-------|-------|------|------|------|-------|-----|-----------|
| | | (mm) | (mm) | (mm) | (mm) | (mm) | (L/min) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | | |
| FI RL 024 A10 N V G1/2 | G 1/2" | 66,0 | 60,0 | 32,0 | 90,0 | 67,0 | 24 | 100,0 | 86,0 | 59,0 | 22,0 | 19,0 | 8,0 | 90,0 | A | 0,36 |
| FI RL 048 P10 N V G1/2 | G 1/2" | 66,0 | 60,0 | 32,0 | 90,0 | 67,0 | 60 | 100,0 | 86,0 | 59,0 | 22,0 | 19,0 | 8,0 | 90,0 | A | 0,40 |
| FI RL 053 A10 N V G1/2 | G 1/2" | 88,0 | 80,0 | 38,0 | 115,0 | 89,0 | 53 | 120,0 | 100,0 | 82,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,74 |
| FI RL 110 P10 N V G1/2 | G 1/2" | 88,0 | 80,0 | 38,0 | 115,0 | 89,0 | 86 | 120,0 | 100,0 | 82,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,61 |
| FI RL 053 A10 N V G3/4 | G 3/4" | 88,0 | 80,0 | 38,0 | 115,0 | 89,0 | 53 | 120,0 | 100,0 | 82,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,74 |
| FI RL 086 P10 N V G3/4 | G 3/4" | 88,0 | 80,0 | 38,0 | 115,0 | 89,0 | 86 | 120,0 | 100,0 | 82,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,74 |
| FI RL 053 A10 N V G1 | G 1" | 88,0 | 80,0 | 38,0 | 115,0 | 89,0 | 53 | 120,0 | 100,0 | 82,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,76 |
| FI RL 086 P10 N V G1 | G 1" | 88,0 | 80,0 | 38,0 | 115,0 | 89,0 | 86 | 120,0 | 100,0 | 82,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,76 |
| FI RL 064 A10 N V G3/4 | G 3/4" | 88,0 | 80,0 | 38,0 | 115,0 | 89,0 | 64 | 170,0 | 150,0 | 80,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,76 |
| FI RL 150 P10 N V G3/4 | G 3/4" | 88,0 | 80,0 | 38,0 | 115,0 | 89,0 | 110 | 170,0 | 150,0 | 80,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,61 |
| FI RL 064 A10 N V G1 | G 1" | 88,0 | 80,0 | 38,0 | 115,0 | 89,0 | 64 | 170,0 | 150,0 | 80,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,76 |
| FI RL 150 P10 N V G1 | G 1" | 88,0 | 80,0 | 38,0 | 115,0 | 89,0 | 110 | 170,0 | 150,0 | 80,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,61 |
| FI RL 125 A10 N V G3/4 | G 3/4" | 88,0 | 80,0 | 46,5 | 115,0 | 89,0 | 125 | 250,0 | 225,0 | 80,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,88 |
| FI RL 225 P10 N V G3/4 | G 3/4" | 88,0 | 80,0 | 46,5 | 115,0 | 89,0 | 220 | 250,0 | 225,0 | 80,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,67 |
| FI RL 125 A10 N V G1 | G 1" | 88,0 | 80,0 | 46,5 | 115,0 | 89,0 | 125 | 250,0 | 225,0 | 80,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,88 |
| FI RL 225 P10 N V G1 | G 1" | 88,0 | 80,0 | 46,5 | 115,0 | 89,0 | 220 | 250,0 | 225,0 | 80,0 | 32,0 | 24,0 | 12,0 | 115,0 | A | 0,67 |
| FI RL 230 A10 N V G11/4 | G 1.1/4" | 129,5 | 112,0 | 47,0 | 175,0 | 131,0 | 230 | 250,0 | 233,0 | 91,0 | 35,0 | 31,0 | 13,0 | 175,0 | C | 1,86 |
| FI RL 190 P10 N V G11/4 | G 1.1/4" | 129,5 | 112,0 | 47,0 | 175,0 | 131,0 | 280 | 250,0 | 233,0 | 91,0 | 35,0 | 31,0 | 13,0 | 175,0 | C | 2,20 |
| FI RL 290 A10 N V G11/4 | G 1.1/4" | 173,5 | 150,0 | 51,0 | 220,0 | 174,5 | 290 | 200,0 | 180,0 | 97,0 | 38,5 | 38,0 | 12,5 | 220,0 | B | 3,42 |
| FI RL 280 P10 N V G11/4 | G 1.1/4" | 173,5 | 150,0 | 51,0 | 220,0 | 174,5 | 370 | 200,0 | 180,0 | 97,0 | 38,5 | 38,0 | 12,5 | 220,0 | B | 3,00 |
| FI RL 290 A10 N V G11/2 | G 1.1/2" | 173,5 | 150,0 | 51,0 | 220,0 | 174,5 | 290 | 200,0 | 180,0 | 97,0 | 38,5 | 38,0 | 12,5 | 220,0 | B | 3,42 |
| FI RL 370 P10 N V G11/2 | G 1.1/2" | 173,5 | 150,0 | 51,0 | 220,0 | 174,5 | 370 | 200,0 | 180,0 | 97,0 | 38,5 | 38,0 | 12,5 | 220,0 | B | 3,42 |
| FI RL 290 A10 N V G2 | G 2" | 173,5 | 150,0 | 51,0 | 220,0 | 174,5 | 290 | 200,0 | 180,0 | 97,0 | 38,5 | 38,0 | 12,5 | 220,0 | B | 3,42 |
| FI RL 370 P10 N V G2 | G 2" | 173,5 | 150,0 | 51,0 | 220,0 | 174,5 | 370 | 200,0 | 180,0 | 97,0 | 38,5 | 38,0 | 12,5 | 220,0 | B | 3,42 |
| FI RL 450 A10 N V G11/2 | G 1.1/2" | 173,5 | 150,0 | 64,0 | 220,0 | 174,5 | 450 | 250,0 | 238,0 | 98,5 | 38,5 | 38,0 | 12,5 | 220,0 | B | 3,42 |
| FI RL 320 P10 N V G11/2 | G 1.1/2" | 173,5 | 150,0 | 64,0 | 220,0 | 174,5 | 610 | 250,0 | 238,0 | 98,5 | 38,5 | 38,0 | 12,5 | 220,0 | B | 3,50 |
| FI RL 540 A10 N V G11/2 | G 1.1/2" | 173,5 | 150,0 | 64,0 | 220,0 | 174,5 | 540 | 310,0 | 290,0 | 97,0 | 38,5 | 38,0 | 12,5 | 220,0 | B | 3,70 |
| FI RL 420 P10 N V G11/2 | G 1.1/2" | 173,5 | 150,0 | 64,0 | 220,0 | 174,5 | 675 | 310,0 | 290,0 | 97,0 | 38,5 | 38,0 | 12,5 | 220,0 | B | 3,70 |
| FI RL 540 A10 N V G2 | G 2" | 173,5 | 150,0 | 64,0 | 220,0 | 174,5 | 540 | 310,0 | 290,0 | 97,0 | 38,5 | 38,0 | 12,5 | 220,0 | B | 3,70 |
| FI RL 675 P10 N V G2 | G 2" | 173,5 | 150,0 | 64,0 | 220,0 | 174,5 | 675 | 310,0 | 290,0 | 97,0 | 38,5 | 38,0 | 12,5 | 220,0 | B | 3,70 |
| FI RL 620 A10 N V SAE2 | 2" SAE 3000 PSI/M | 173,5 | 150,0 | 64,0 | 220,0 | 174,5 | 620 | 450,0 | 430,0 | 105,0 | 48,5 | 38,0 | 12,5 | 220,0 | B | 5,68 |
| FI RL 750 P10 N V SAE2 | 2" SAE 3000 PSI/M | 173,5 | 150,0 | 64,0 | 220,0 | 174,5 | 750 | 450,0 | 430,0 | 105,0 | 48,5 | 38,0 | 12,5 | 220,0 | B | 5,68 |
| FI RL 620 A10 N V G2 | G 2" | 173,5 | 150,0 | 64,0 | 220,0 | 174,5 | 620 | 450,0 | 430,0 | 105,0 | 48,5 | 38,0 | 12,5 | 220,0 | B | 5,68 |
| FI RL 750 P10 N V G2 | G 2" | 173,5 | 150,0 | 64,0 | 220,0 | 174,5 | 750 | 450,0 | 430,0 | 105,0 | 48,5 | 38,0 | 12,5 | 220,0 | B | 5,68 |

A10 z anorganskim filtrom (10 µm), absolutna filtracija – P10 papirnati filter (10 µm), nazivna filtracija – Qmax - maks. volumski pretok



FI RL

filter povratnega toka

Pribor

HK VA MAN Clogging indicator pressure gauge

FI RL RVL cevni podaljšek za filter povratnega toka

Nadomestni deli

FI RL E MP filtrirni element za filter povratnega toka MP

FI RL GEH ohišje za filter povratnega toka