

TUE LF PN16

prirobnica LOS z ozobljenimi nastavki, PN10/16, jeklo VZ

HANSA FLEX

Lastnosti


Priključek 1 prosta prirobnica
v tlačnem razredu PN16

Oblika izdelave ravno

Oblika tesnila 1 ploščato tesnenje

Območje uporabe Industrija

Standard DIN EN 1092-1

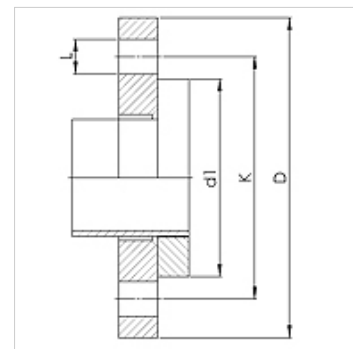

Artikel

| Opis | DN* | Size | Palec | Ø D (mm) | K (mm) | Ø d2 (mm) | N (mm) |
|-----------------|-----|------|--------|-------------|-----------|--------------|-----------|
| TUE 20 LF PN16 | 20 | 12 | 3/4" | 105,0 | 75 | 14 | 4 |
| TUE 25 LF PN16 | 25 | 16 | 1" | 115,0 | 85 | 14 | 4 |
| TUE 32 LF PN16 | 32 | 20 | 1.1/4" | 140,0 | 100 | 18 | 4 |
| TUE 38 LF PN16 | 40 | 24 | 1.1/2" | 150,0 | 110 | 18 | 4 |
| TUE 50 LF PN16 | 50 | 32 | 2" | 165,0 | 125 | 18 | 4 |
| TUE 63 LF PN16 | 63 | 40 | 2.1/2" | 185,0 | 145 | 18 | 4 |
| TUE 75 LF PN16 | 75 | 50 | 3" | 200,0 | 160 | 18 | 8 |
| TUE 102 LF PN16 | 100 | 64 | 4" | 220,0 | 180 | 18 | 8 |

N = število lukenj

Pribor

KS AL Spojna objemka, aluminij

KS FIX AL Spojna objemka za povezavo z zatiči, aluminij

Dodatni elementi

FD C4400 Ploščato tesnilo