

TUE FF PN16

prirobnica FEST z ozobljenimi nastavki, PN10/16, jeklo VZ

HANSA FLEX

Lastnosti


Priključek 1 fiksna prirobnica
v tlačnem razredu PN16

Oblika izdelave ravno

Oblika tesnila 1 ploščato tesnenje

Območje uporabe Industrija

Standard DIN EN 1092-1

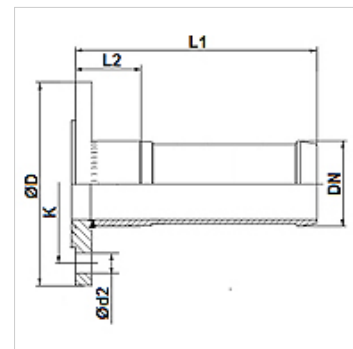

Artikel

Opis	DN*	Size	Palec	Ø D (mm)	K (mm)	Ø d2 (mm)	N (mm)
TUE 20 FF PN16	20	12	3/4"	105,0	75	14	4
TUE 25 FF PN16	25	16	1"	115,0	85	14	4
TUE 32 FF PN16	32	20	1.1/4"	140,0	100	18	4
TUE 38 FF PN16	40	24	1.1/2"	150,0	110	18	4
TUE 50 FF PN16	50	32	2"	165,0	125	18	4
TUE 63 FF PN16	63	40	2.1/2"	185,0	145	18	4
TUE 75 FF PN16	75	50	3"	200,0	160	18	8
TUE 102 FF PN16	100	64	4"	220,0	180	18	8

N = število lukenj

Pribor

KS AL Spojna objemka, aluminij

KS FIX AL Spojna objemka za povezavo z zatiči, aluminij

Dodatni elementi

FD C4400 Ploščato tesnilo