
K-INLINE-DRG AG IG O SEKUNDAERENTLU

Inline pressure regulators, non-self-relieving

Lastnosti

Obratovalni tlak	max. 18 bar
območje temperatur:	0 °C to +60 °C
toleranca tlaka	± 0.3 bar at 10 l/min
ohišje	Zinc
drugi deli	Brass, NBR, stainless steel



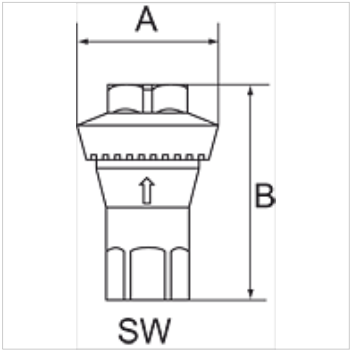

Navodilo

Drugi podatki na zahtevo.

Opis

This single-acting diaphragm regulator can be installed in any pneumatic system. Since the pressure is preset in the factory and cannot be altered, the product is also tamper-proof. We recommend mounting the regulator directly on the tool to make sure the correct pressure is applied. In this case, the tool is never stressed by the higher pressure of the supply system and is protected against pressure fluctuations in hoses, pipes, etc. Energy efficiency and economic efficiency can be achieved by using an inline pressure regulator.

Artikel

Opis	Navoj	delovni tlak, prednastavljeni	A (mm)	B	SW (mm)
K- 07 25 02 75	G 1/4	1 bar	34,0	52,0 mm	17
K- 07 25 02 76	G 1/4	2 bar	34,0	52,0 mm	17
K- 07 25 02 77	G 1/4	3 bar	34,0	52,0 mm	17
K- 07 25 02 78	G 1/4	4 bar	34,0	52,0 mm	17
K- 07 25 02 79	G 1/4	5 bar	34,0	52,0 mm	17
K- 07 25 02 80	G 1/4	6 bar	34,0	52,0 mm	17
K- 07 25 02 81	G 1/4	6,5 bar	34,0	52,0 mm	17
K- 07 25 02 82	G 1/4	7 bar	34,0	52,0 mm	17

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.