
K-SCHL-AUFROLLER LUFT

Hose reels for compressed air

Lastnosti

Material cevi	Braided polyurethane
Obratovalni tlak	Max. 16 bar; 13.5 x 9.5 mm hose: max. 12 bar
delovna temperatura	-20 °C to +60 °C
kot zasuka	300°



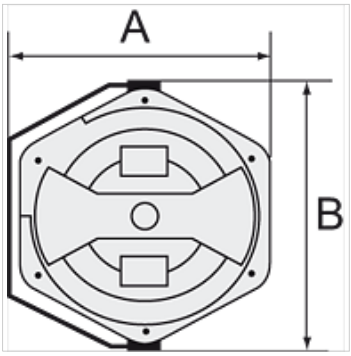

Navodilo

Drugi podatki na zahtevo.

Opis

For easy mounting on the wall or ceiling. Closed, rugged, impact-resistant housing made of POM, supply/outlet R 1/4 male thread and lightweight, hard-wearing, oil-resistant polyurethane hose. Incl. 2 m feeder hose (not Art. K-07100618).

Dodatne informacije

Housing of K-07100621, K-07100620 and K-07100618 identical to K-07100614

Artikel

Opis	mera cevi	A (mm)	B (mm)	dolžina cevi (m)
K- 07 10 06 18	12 mm x 8 mm	394,5	436,0	7
K- 07 10 06 19	12 mm x 8 mm	361,0	390,0	10
K- 07 10 06 20	12 mm x 8 mm	394,5	436,0	16
K- 07 10 06 21	13,5 mm x 9,5 mm	394,5	436,0	14

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.