
K-SPIR SCHL KUPPL SET

Spiral hose and coupling kits

Lastnosti

Obratovalni tlak	max. 10 bar (to the temperature +20 °C); max. 7 bar (at temperature +40 °C); max. 5 bar (at temperature +60 °C)
spojka	High quality hand quick release coupling of steel for high flow rates For demanding applications with high mechanical wear
spiralna cev	Polyurethane

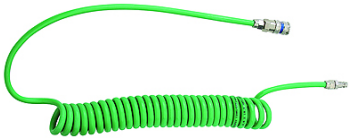

Navodilo

Drugi podatki na zahtevo.

Opis

For pneumatic applications in challenging industrial environments. High-quality, one-hand quick disconnect coupling made of steel with safety lock to prevent unintentional disconnection. For complex applications susceptible to severe mechanical wear. The outer layer of the hose, which is designed to withstand flying sparks and scorching, has special spark protection. It is therefore ideal for all pneumatic tools used in welding processes.

Artikel

Opis	mera cevi	Ø spirale (mm)	delovna dolžina (m)
K- 07 10 07 56	10 mm x 6,5 mm	52	4,0
K- 07 10 07 57	10 mm x 6,5 mm	52	6,0
K- 07 10 07 58	12 mm x 8 mm	65	8,0

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.