

K-GRUNDEJEKTION SBP

Basic ejectors

HANSA FLEX

Lastnosti

Lastnosti	Vacuum generator without control valves or system monitoring functions, with a high maximum vacuum value (85%) No moving parts, which means no wear and no maintenance Maximum suction capacity with minimum compressed air consumption Minimum size, low weight For decentralised vacuum generation in highly dynamic processes
------------------	--

Uporaba	For universal use in lightweight gripper systems to handle air-tight workpieces as well as for automatic separation systems, e.g. in the plastics, electronics and packaging industries. Also ideal for the construction of ejector blocks for decentralised control of suction pads.
----------------	--


ohišje	Plastic (impact-resistant)
---------------	----------------------------

Priključek	Push-in coupling
-------------------	------------------

Obratovalni tlak	4.5 bar
-------------------------	---------

stopnja praznjenja	85 %
---------------------------	------

dušilnik zvoka	Plastic
-----------------------	---------

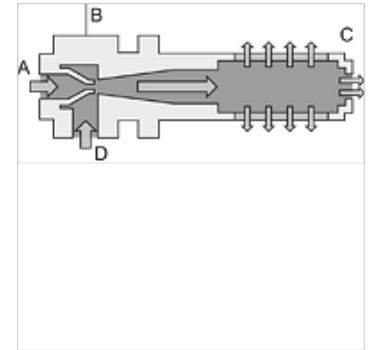

Navodilo

Drugi podatki na zahtevo.

Opis

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Artikel

Opis	velikost šobe	priključek za stisnjen zrak	vakuumski priključek	poraba zraka za sesanje (L/min)	maks. sesalna zmogljivost (L/min)	Mera
K- 07 45 01 13	0,5	4 mm	4 mm	14,0	8,0	71mm x 10mm x 28mm
K- 07 45 01 14	0,7	4 mm	4 mm	22,0	16,0	71mm x 10mm x 28mm
K- 07 45 01 15	1,0	6 mm	8 mm	48,0	37,7	97mm x 15mm x 40mm
K- 07 45 01 16	1,5	6 mm	8 mm	105,0	71,0	97mm x 15mm x 40mm
K- 07 45 01 17	2,0	8 mm	10 mm	197,0	127,0	168mm x 20mm x 46mm
K- 07 45 01 18	2,5	8 mm	10 mm	311,0	215,0	168mm x 20mm x 46mm

Pribor

K-GRUNDPLATTEN 1	Base plate
K-ERSATZSCHALLDAEMPFER 3	Replacement silencers
K-ERSATZSCHALLDAEMPFER 1	Replacement silencers