


K-INLINE-EJEKTOREN VR

Inline ejectors »VR«, screw connection

HANSA FLEX

Lastnosti

Lastnosti	Vacuum generator with high maximum vacuum level (85% vacuum) No moving parts, which means no wear and no maintenance ultra small footprint, suitable for confined spaces minimal air consumption low noise
Uporaba	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
ohišje	Aluminium eloxed (type VR)
sistem šobe	Brass (type VR)
Prikluček	vtični prikluček

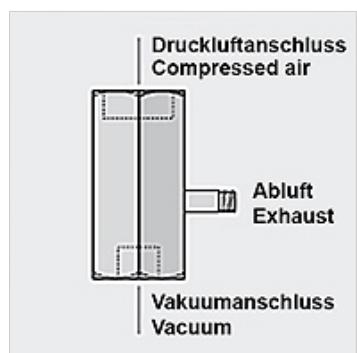

Navodilo

Drugi podatki na zahtevo.

Opis

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Artikel

Opis	velikost šobe	odzračevalni prikluček	prikluček za stisnjen zrak	vakuumski prikluček	stopnja praznjenja	poraba zraka za sesanje (L/min)	maks. sesalna zmogljivost (L/min)	dolžina (mm)	Obratovalni tlak (bar)
K- 07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K- 07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0