

K-KOMPAKTEJEKTOREN CP SYST

Compact ejectors »CP«, system monitoring function: digital vacuum switch

HANSA FLEX

Lastnosti

Lastnosti


- Vacuum generator with integrated control valves and system monitoring functions
- Gripping and blowing off can be controlled without the need for external valves
- Optimised air consumption thanks to many models with differing suction capacities
- Minimum energy costs in continuous operation thanks to automatic air-saving
- Easy adjustment with foil keypad and LED display of the settings

Uporaba

Handling of air-tight or slightly porous workpieces in fully automated handling systems e.g. in the robotics, automotive, packaging, electronics, electrical engineering and metalworking industries

osnovno ohišje Anodised aluminium

integrirano NC blow-off valve, filter, silencer, non-return valve

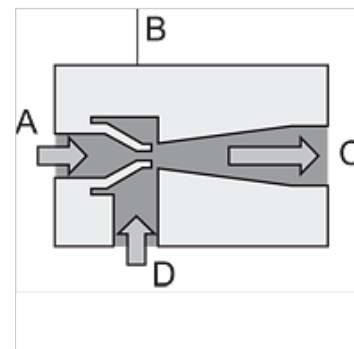

Navodilo

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. Drugi podatki na zahtevo.

Opis

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Dodatne informacije

Important: Order two connection plugs per ejector. A cable set is included with the compact ejector with automatic air-saving.

Artikel

| Opis | velikost šobe | mirujoči položaj sesalnega ventila | priključek za stisnjen zrak | vakuumski priključek | poraba zraka za sesanje (L/min) | maks. sesalna zmogljivost (L/min) | Mera | Obratovalni tlak (bar) |
|----------------|---------------|------------------------------------|-----------------------------|----------------------|---------------------------------|-----------------------------------|----------------------|------------------------|
| K- 07 45 01 35 | 1,5 | NC | G 1/8 IG | G1/8 female | 117,0 | 65,0 | 72mm x 20mm x 164mm | 5,0 |
| K- 07 45 01 36 | 1,5 | NO | G 1/8 IG | G1/8 female | 117,0 | 65,0 | 72mm x 20mm x 164mm | 5,0 |
| K- 07 45 01 39 | 2,0 | NC | G 1/4 IG | G 3/8 female | 190,0 | 116,0 | 113mm x 22mm x 168mm | 6,0 |
| K- 07 45 01 40 | 2,0 | NO | G 1/4 IG | G 3/8 female | 190,0 | 116,0 | 113mm x 22mm x 168mm | 6,0 |
| K- 07 45 01 43 | 2,5 | NC | G 1/4 IG | G 3/8 female | 310,0 | 161,0 | 113mm x 22mm x 183mm | 6,0 |
| K- 07 45 01 44 | 2,5 | NO | G 1/4 IG | G 3/8 female | 310,0 | 161,0 | 113mm x 22mm x 183mm | 6,0 |

Pribor

| | |
|---------------------------|------------------------------------|
| K-ANSCH KABEL VAKUUMSCHAL | Connection cable for vacuum switch |
| K-ERSATZSCHALLDAEMPFER 2 | Replacement silencers |
| K-ERSATZFILTERELEMENTE | Replacement filter element |