


# K-KOMPAKTEJEKTOREN MINI

Mini-compact ejectors

**HANSA FLEX**

## Lastnosti

<b>Lastnosti</b>	Vacuum generator with integrated control valves and system monitoring functions Gripping and blowing off can be controlled without the need for external valves Optimised air consumption thanks to many models with differing suction capacities Minimum energy costs in continuous operation Easy adjustment with foil keypad, LED display of the settings Minimum size and low weight Optimum vacuum generation directly on the suction pad Complete solution for very simple installation Short learning curve thanks to "teach" function No need for additional sensors Easily visible status indication
------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

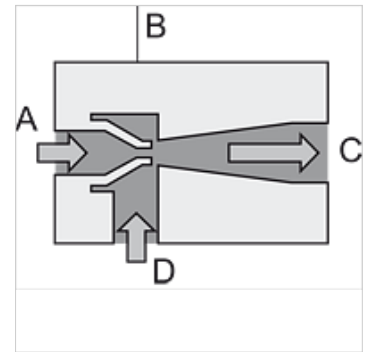

<b>Uporaba</b>	Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes pick-and-place systems
<b>stopnja praznjenja</b>	85 %
<b>osnovno ohišje</b>	Anodised aluminium
<b>integrirano</b>	NC blow-off valve, filter, silencer, non-return valve

## Navodilo

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. Drugi podatki na zahtevo.

## Opis

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

## Dodatne informacije

Important: Order two connection plugs per ejector.

## Artikel

Opis	velikost šobe	mirujoči položaj sesalnega ventila	priključek za stisnjen zrak	vakuumski priključek	poraba zraka za sesanje (L/min)	maks. sesalna zmogljivost (L/min)	Mera	Obratovalni tlak (bar)
K- 07 45 01 46	1,0	NC	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5
K- 07 45 01 45	1,0	NO	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5

## Pribor

<b>K-ANSCHLUSSTECK MAGNETVE 1</b>	Connection plug for solenoid valves
<b>K-ERSATZSCHALLDAEMPFER</b>	Replacement silencers
<b>K-ERSATZFILTERELEMENTE 1</b>	Replacement filter element