

K-SAUGPLATTENAUFHAENGUNG

Flexible suction pad mountings

Lastnosti

Uporaba	For handling of workpieces with sloping using large-area vacuum gripper Handling of large plates that can sag when lifting In combination with spring plungers to compensate height-differences and Uneveness
Posebne značilnosti	very good adaptation to oblique workpiece surfaces automatic Rückstellung in die Ausgangslage vacuum-tight design with integrated protection against damage

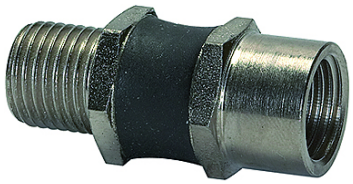

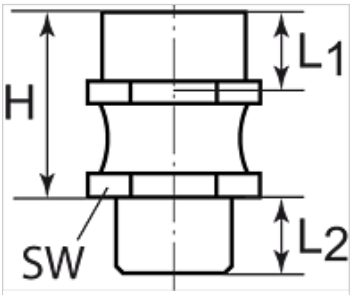

Navodilo

Drugi podatki na zahtevo.

Opis

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Artikel

Opis	navoj 1 znotraj	navoj 2 zunaj	H (mm)	Material:	L1 (mm)	L2 (mm)	kotnik W (°)	navpična obremenitev (N/m2)	upogibni moment (N/m2)	SW (mm)
K- 07 45 01 47	G 1/4	M 10 x 1.25	27,0	Steel, rubber	10,5	8,0	12	500	8,0	17
K- 07 45 01 48	G 1/4	G 1/4	27,0	Steel, rubber	12,0	12,0	12	750	10,0	17

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.