


K-DRUCKSCHALTER VAKUUM

Combined vacuum/pressure switch

HANSA FLEX

Lastnosti

Način izdelave	PNP
priključek za merjeni medij	G 1/8 male and M 5 female
histereza	Adjustable: 3 to 25% of set value
območje temperatur:	0 - 50 °C
Sredstva	Non-aggressive gases. dry, oil-free air
ohišje	Polycarbonate
izhodni signal	Analogue: 1 to 5 V
Električni priključek	Male connector M8, four pin
zmogljivost stikala	125 mA
potrebni tok	30 mA
prikaz stanja	LED

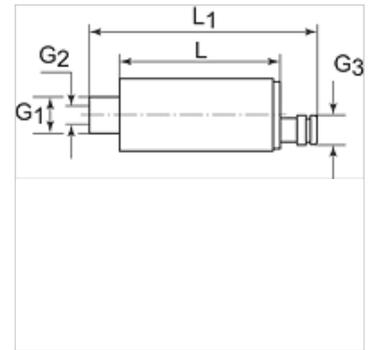

Navodilo

Drugi podatki na zahtevo.

Opis

Universal electronic vacuum and pressure switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly at the point of use. Suitable for all special applications in the vacuum and compressed air sectors. Adjustable vacuum limit value and continuous vacuum monitoring.

Artikel

Opis	G1 zunaj	G2 znotraj	G3 zunaj	L (mm)	L1 (mm)	Mersko območje	Napetost
K- 07 45 01 31	G 1/8	M 5	M 8 x 1	44,0	62,0	-1 bis +10 bar	10.8 - 30 V DC