



# K-VAKUUMSCHALTER

Vacuum switch

**HANSA FLEX**

## Lastnosti

priključek za merjeni medij	G 1/8 male and M 5 female
izhodni signal	Analogue: 1 to 5 V
Električni priključek	Male connector M8, four pin
histereza	Adjustable: 3 to 25% of set value
Sredstva	Non-aggressive gases. dry, oil-free air
preklopna funkcija	PNP
zmogljivost stikala	125 mA
potrebni tok	30 mA
območje temperatur:	0 - 50 °C
ohišje	Polycarbonate

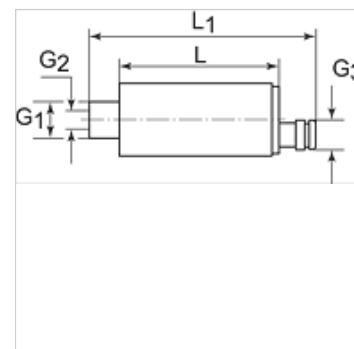

## Navodilo

Drugi podatki na zahtevo.

## Opis

Universal electronic vacuum switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly on the suction pad. <br>Switching point and hysteresis adjustable with a screw. Integrated LED for indication of the switching state.

## Artikel

Opis	G1 zunaj	G2 znotraj	G3 zunaj	L (mm)	L1 (mm)	Mersko območje	Napetost
K- 07 45 01 58	G 1/8	M 5	M 8 x 1	44,0	62,0	-1 bis 0 bar	10.8 - 30 V DC