


# K-VAKUUMSENSOR DIGITAL

Vacuum sensor, digital

**HANSA FLEX**

## Lastnosti

|                            |   |
|----------------------------|---|
| <b>Uporaba</b>             | Measurement of vacuum values close to the suction pad<br>Remote evaluation of the signals<br>Processing the output signals, for example, by PLC |
| <b>Sredstva</b>            | dry, oil-free air and non-aggressive gases  |
| <b>območje temperatur:</b> | 0 - 50 °C   |
| <b>izhodni signal</b>      | 1 to 5 analogous to V   |
| <b>histereza</b>           | Fixed: 20 mbar (model with digital sensor)  |
| <b>dolžina kabla</b>       | 3 m   |
| <b>razred zaščite</b>      | IP 40   |

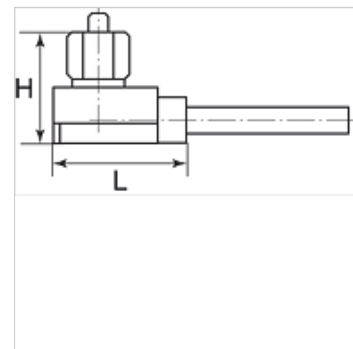

## Navodilo

Drugi podatki na zahtevo.

## Opis

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

## Artikel

| Opis           | Priključek | H<br>(mm) | L<br>(mm) | Mersko območje | Napetost     |
|----------------|------------|-----------|-----------|----------------|--------------|
| K- 07 45 01 57 | M 5 male   | 16,9      | 21,0      | -1 bis 0 bar   | 10 - 24 V DC |