


K-VAKUUMSENSOR DIGITAL

Vacuum sensor, digital

HANSA FLEX

Lastnosti

Uporaba	Measurement of vacuum values close to the suction pad Remote evaluation of the signals Processing the output signals, for example, by PLC
Sredstva	dry, oil-free air and non-aggressive gases
območje temperatur:	0 - 50 °C
izhodni signal	1 to 5 analogous to V
histereza	Fixed: 20 mbar (model with digital sensor)
dolžina kabla	3 m
razred zaščite	IP 40

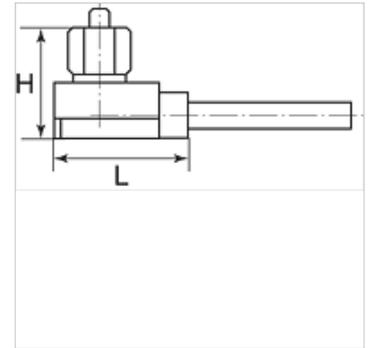

Navodilo

Drugi podatki na zahtevo.

Opis

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

Artikel

Opis	Priključek	H (mm)	L (mm)	Mersko območje	Napetost
K- 07 45 01 57	M 5 male	16,9	21,0	-1 bis 0 bar	10 - 24 V DC