


K-DRV

Unidirectional flow control valves

Lastnosti

Obratovalni tlak	maks. 10 bar
delovna temperatura	max. +70 °C
tesnilni material	NBR
ohišje	Alu eloxed
notranji deli	Brass

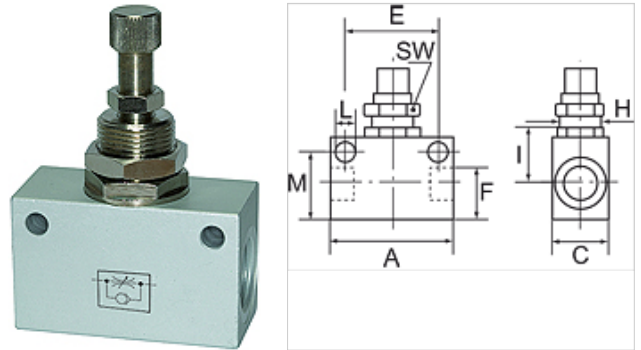

Navodilo

Drugi podatki na zahtevo.

Opis

These valves are restricted in the flow direction and have free passage in the opposite direction.

Artikel

Opis	Navoj	A (mm)	C (mm)	E (mm)	mera H	I (mm)	L (mm)	M (mm)	SW (mm)
K- 07 30 12 36	M 5	25,0	12,0	18,0	M 9 x 0.75 mm	10,0	3,2	12,2	11
K- 07 30 12 37	G 1/8	34,0	16,0	24,0	M 12 x 0.75 mm	15,0	4,5	16,4	15
K- 07 30 12 38	G 1/4	50,0	25,0	35,0	M 18 x 1.5 mm	24,0	6,5	23,8	22
K- 07 30 12 39	G 3/8	58,0	25,0	40,0	M 18 x 1.5 mm	24,0	6,5	25,3	22
K- 07 30 12 40	G 1/2	65,0	30,0	50,0	M 22 x 1.5 mm	29,0	6,5	33,0	26