


# K-3 BKR STELLANTR E T MS

Brass ball valves, 3-way, with double-acting actuator, T-bore, normal position

**HANSA FLEX**

## Lastnosti

<b>Način izdelave</b>	Pneumatic actuators, in double- or single acting version, with integrated end-position feedback
<b>Vrtina</b>	izvedba T
<b>delovna temperatura</b>	-20 °C to +70 °C
<b>kot zasuka</b>	90 °
<b>krmilni tlak</b>	5.5 bar
<b>ventilski adapter</b>	Supplied as standard
<b>pogon</b>	aluminium eloxed
<b>tesnilo pogona</b>	NBR
<b>krogelna pipa</b>	Chrome-plated brass, with ISO-flange plate
<b>tesnilo krogelne pipe</b>	PTFE/FKM

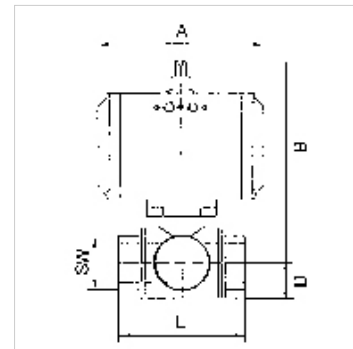

## Navodilo

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

Drugi podatki na zahtevo.

## Opis

3-way cock, T-bore, full bore

## Dodatne informacije

Other T-positions on request

## Artikel

Opis	DN	Navoj	položaj	PN (bar)	A (mm)	B (mm)	D (mm)	L (mm)	SW (mm)
K- 07 30 03 17	15	Rp 1/2	T 3	40	133,0	142,0	20,0	64,5	25
K- 07 30 03 18	20	Rp 3/4	T 3	40	133,0	146,0	24,0	76,0	31
K- 07 30 03 19	25	Rp 1	T 3	40	133,0	150,5	30,0	97,0	41
K- 07 30 03 20	32	Rp 1 1/4	T 3	40	161,0	191,5	37,0	118,0	55
K- 07 30 03 21	40	Rp 1 1/2	T 3	25	180,0	193,5	43,0	133,0	55
K- 07 30 03 22	50	Rp 2	T 3	25	209,0	221,0	56,0	157,0	67