



K-BKR ANTR D FEDER MS

Brass ball valves, single-acting actuator - spring to close

HANSA FLEX

Lastnosti

Način izdelave	Pneumatic, double-piston, part-turn actuator, double-rocker principle
Obratovalni tlak	Max. 16 bar
delovna temperatura	-20 °C to +150 °C
kot zasuka	90 °
krmilni tlak	5.6 bar
ventilski adapter	Supplied as standard
območje temperatur:	-20 °C to +80 °C
pogon	aluminium eloxed
tesnilo pogona	NBR
krogelna pipa	Chrome-plated brass, with ISO-flange plate
tesnilo krogelne pipe	PTFE/FKM

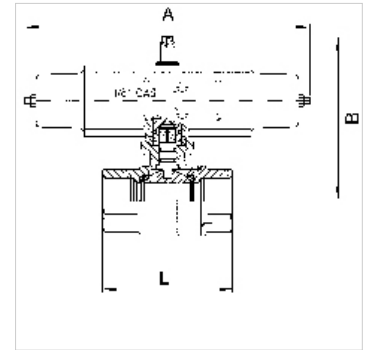

Navodilo

Drugi podatki na zahtevo.

Artikel

Opis	DN	Navoj	A (mm)	B (mm)	L (mm)
K- 07 30 02 35	10	Rp 3/8	221,0	110,0	69,0
K- 07 30 02 36	15	Rp 1/2	221,0	110,0	69,0
K- 07 30 02 37	20	Rp 3/4	221,0	117,0	77,0
K- 07 30 02 38	25	Rp 1	221,0	121,0	89,0
K- 07 30 02 39	32	Rp 1 1/4	221,0	131,0	103,0
K- 07 30 02 40	40	Rp 1 1/2	221,0	137,0	114,0
K- 07 30 02 41	50	Rp 2	240,0	155,0	134,0