



# K-MV 3/2 24V DC

3/2-way solenoid valves, normally closed, directly operated, 24 V DC (direct current)

**HANSA FLEX**

## Lastnosti

<b>Električni priključek</b>	For Pg 11P connector socket, acc. to ISO 4400
<b>razred zaščite</b>	IP65 (with connector socket fitted)
<b>opis navoja</b>	Rp thread acc. to ISO 7-1
<b>ohišje, sedež ventila</b>	Brass
<b>notranji deli</b>	Stainless steel
<b>tesnilo</b>	Perbunan (NBR)

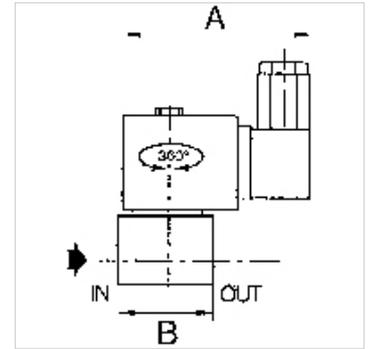

## Navodilo

Drugi podatki na zahtevo.

## Opis

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

## Artikel

Opis	Navoj	najv. obratovalni tlak (bar)	nazivni premer	A (mm)	B (mm)	izvedba
K- 07 30 23 22	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 23 23	Rp 1/4	4	3,2	80,0	43,0	10