


K-MV 3/2 ELK

Solenoid valves

HANSA FLEX

Lastnosti

| | |
|-------------------------|--|
| razred zaščite | IP65 (with connector socket fitted) |
| temperatura medija | -10 °C to +100 °C |
| odzračevalni priključek | M 5 |
| Uporaba | Compressed air and neutral, non-toxic gases, not suitable for liquids |
| Obratovalni tlak | min. 0,0 bar; max. 15,0 bar |
| Električni del | system connection plug, 180° movement, PG7 exchangeable magnetic heads AC/DC |
| nazivni premer | 1,2 mm |
| temperatura okolice | -10 °C to +60 °C |
| ohišje | Brass |
| notranji deli | Stainless steel |
| tesnila | FPM |

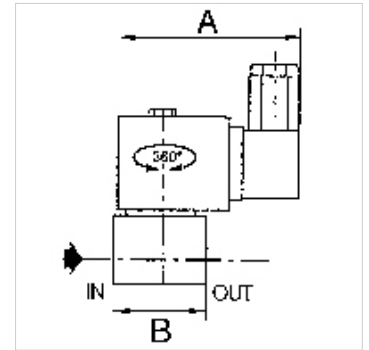

Navodilo

Drugi podatki na zahtevo.

Opis

Directly operated seat valve with spring return and manual operator. Also suitable for vacuum operation.

Artikel

| Opis | Navoj | Napetost | A (mm) | B (mm) |
|----------------|-------|--------------------|-----------|-----------|
| K- 07 30 22 50 | G 1/8 | 230/50 V AC, 50 Hz | 58,0 | 33,0 |
| K- 07 30 22 51 | G 1/8 | 24 V DC | 58,0 | 33,0 |