


K-MV G Z 230 V, 50 - 60 HZ 1

Normally closed, combined operation, 230 V, 50 to 60 Hz

HANSA FLEX

Lastnosti

Električni priključek	ISO 4400. cable socket (Pg 11P)
razred zaščite	IP65 (with connector socket fitted)
temperatura medija	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
opis navoja	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
ohišje, sedež ventila	Brass
notranji deli	Stainless steel
tesnilo	Perbunan (NBR) or FKM

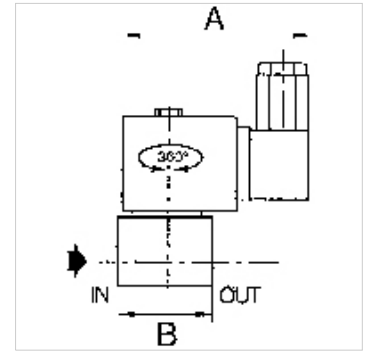

Navodilo

Drugi podatki na zahtevo.

Opis

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Artikel

Opis	Navoj	najv. obratovalni tlak (bar)	nazivni premer	tesnilni material	A (mm)	B (mm)	izvedba
K- 07 30 22 84	Rp 3/8	9	16,0	NBR	80,0	70,0	3
K- 07 30 22 90	Rp 3/8	9	16,0	FKM	80,0	70,0	3
K- 07 30 22 85	Rp 1/2	9	16,0	NBR	80,0	70,0	3
K- 07 30 22 91	Rp 1/2	9	16,0	FKM	80,0	70,0	3
K- 07 30 22 86	Rp 3/4	9	19,0	NBR	80,0	70,0	3
K- 07 30 22 92	Rp 3/4	9	19,0	FKM	80,0	70,0	3
K- 07 30 22 87	Rp 1	9	25,0	NBR	86,0	95,0	3
K- 07 30 22 93	Rp 1	9	25,0	FKM	86,0	95,0	3
K- 07 30 22 88	Rp 1 1/4	9	28,0	NBR	86,0	95,0	3
K- 07 30 22 89	Rp 1 1/2	9	32,0	FKM	86,0	111,0	3