


# K-HOCHLEIST SICHERHEITSVEN

High-pressure safety valves

**HANSA FLEX**

## Lastnosti

|                     |  |
|---------------------|--|
| Uporaba             | Compressed air and other non-toxic, neutral and non-flammable gases may escape freely. Not suitable for steam. |
| Obratovalni tlak    | 0.5 - 20 bar   |
| delovna temperatura | max. 180 °C  |
| vzmetni pokrov      | Brass (up to G 1) / cast iron (powder coated blue G 1 1/4 or larger)   |
| ohišje ventila      | Brass  |

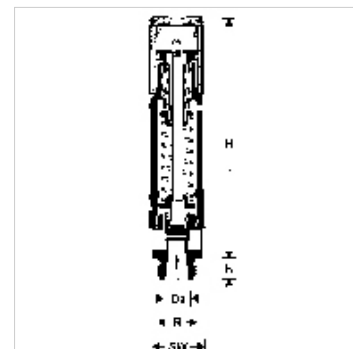

## Navodilo

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

Drugi podatki na zahtevo.

## Opis

Proportional, spring-loaded safety valves with a lifting device. Type-tested acc. to VdTÜV Specification for safety valves 100. Exceptionally reliable, even when installed in extreme environments (vibration-resistant design).

## Dodatne informacije

Important information: These valves are type-tested and are only allowed to be delivered with a fixed setting.

## Artikel

| Opis           | Navoj  | Vklopni tlak | do (mm) | H (mm) | moč                         | SW (mm) |
|----------------|--------|--------------|---------|--------|-----------------------------|---------|
| K- 07 30 16 19 | G 1/2" | 0.5 bar      | 10,0    | 138,0  | 53 - 786 Nm <sup>3</sup> /h | 27      |
| K- 07 30 16 20 | G 1/2" | 0.6 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 21 | G 1/2" | 0.8 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 22 | G 1/2" | 0.9 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 23 | G 1/2" | 1.0 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 24 | G 1/2" | 1.1 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 25 | G 1/2" | 1.2 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 26 | G 1/2" | 1.3 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 27 | G 1/2" | 1.5 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 28 | G 1/2" | 1.6 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 29 | G 1/2" | 1.7 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 30 | G 1/2" | 1.8 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 52 | G 1/2" | 2.0 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 53 | G 1/2" | 2.1 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 54 | G 1/2" | 2.2 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 55 | G 1/2" | 2.5 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 56 | G 1/2" | 2.6 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 57 | G 1/2" | 2.7 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 58 | G 1/2" | 2.9 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 65 | G 1/2" | 3.0 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 66 | G 1/2" | 3.1 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 67 | G 1/2" | 3.2 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 68 | G 1/2" | 3.5 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 69 | G 1/2" | 3.9 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 71 | G 1/2" | 4.0 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 72 | G 1/2" | 4.3 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 73 | G 1/2" | 4.5 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 74 | G 1/2" | 5.0 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 75 | G 1/2" | 5.2 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 76 | G 1/2" | 5.3 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 77 | G 1/2" | 5.4 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 78 | G 1/2" | 5.5 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 79 | G 1/2" | 6.0 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 80 | G 1/2" | 6.3 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 81 | G 1/2" | 6.4 bar      | 10,0    | 138,0  | -                           | 27      |
| K- 07 30 16 82 | G 1/2" | 6.5 bar      | 10,0    | 138,0  | -                           | 27      |



Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.

16.07.2024

HANSA-FLEX AG

www.hansa-flex.com

1

# K-HOCHLEIST SICHERHEITSVEN

High-pressure safety valves

**HANSA FLEX**

## Artikel

| Opis           | Navoj  | Vklopni tlak | do (mm) | H (mm) | moč             | SW (mm) |
|----------------|--------|--------------|---------|--------|-----------------|---------|
| K- 07 30 16 83 | G 1/2" | 6.6 bar      | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 84 | G 1/2" | 7.0 bar      | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 85 | G 1/2" | 7.5 bar      | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 86 | G 1/2" | 7.9 bar      | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 87 | G 1/2" | 8.0 bar      | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 88 | G 1/2" | 8.5 bar      | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 89 | G 1/2" | 9.0 bar      | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 90 | G 1/2" | 9.1 bar      | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 91 | G 1/2" | 9.5 bar      | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 31 | G 1/2" | 10.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 32 | G 1/2" | 10.5 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 33 | G 1/2" | 10.9 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 34 | G 1/2" | 11.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 35 | G 1/2" | 11.5 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 36 | G 1/2" | 11.7 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 37 | G 1/2" | 12.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 38 | G 1/2" | 12.5 bar     | 10,0    | 138,0  | 53 - 786 Nm3/h  | 27      |
| K- 07 30 16 39 | G 1/2" | 13.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 40 | G 1/2" | 13.5 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 41 | G 1/2" | 14.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 42 | G 1/2" | 14.3 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 43 | G 1/2" | 14.5 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 44 | G 1/2" | 14.7 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 45 | G 1/2" | 15.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 46 | G 1/2" | 16.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 47 | G 1/2" | 16.5 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 48 | G 1/2" | 17.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 49 | G 1/2" | 18.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 50 | G 1/2" | 19.5 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 51 | G 1/2" | 19.8 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 59 | G 1/2" | 20.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 60 | G 1/2" | 21.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 61 | G 1/2" | 24.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 62 | G 1/2" | 24.5 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 63 | G 1/2" | 25.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 64 | G 1/2" | 26.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 70 | G 1/2" | 30.0 bar     | 10,0    | 138,0  | -               | 27      |
| K- 07 30 16 92 | G 3/4" | 0.5 bar      | 15,0    | 153,0  | 79 - 1172 Nm3/h | 36      |
| K- 07 30 16 93 | G 3/4" | 0.6 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 16 94 | G 3/4" | 0.7 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 16 95 | G 3/4" | 0.8 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 16 96 | G 3/4" | 0.9 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 16 97 | G 3/4" | 1.0 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 16 98 | G 3/4" | 1.2 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 16 99 | G 3/4" | 1.3 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 00 | G 3/4" | 1.5 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 01 | G 3/4" | 1.6 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 24 | G 3/4" | 2.0 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 25 | G 3/4" | 2.5 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 26 | G 3/4" | 2.6 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 27 | G 3/4" | 2.7 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 32 | G 3/4" | 3.0 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 33 | G 3/4" | 3.5 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 35 | G 3/4" | 4.0 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 36 | G 3/4" | 4.5 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 37 | G 3/4" | 5.0 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 38 | G 3/4" | 6.0 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 39 | G 3/4" | 6.4 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 40 | G 3/4" | 6.5 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 41 | G 3/4" | 6.8 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 42 | G 3/4" | 7.0 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 43 | G 3/4" | 8.0 bar      | 15,0    | 153,0  | -               | 36      |
| K- 07 30 17 44 | G 3/4" | 8.3 bar      | 15,0    | 153,0  | -               | 36      |



Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.

16.07.2024

HANSA-FLEX AG

www.hansa-flex.com

2

# K-HOCHLEIST SICHERHEITSVEN

High-pressure safety valves

**HANSA FLEX**

## Artikel

| Opis           | Navoj  | Vklopni tlak | do (mm) | H (mm) | moč              | SW (mm) |
|----------------|--------|--------------|---------|--------|------------------|---------|
| K- 07 30 17 45 | G 3/4" | 8.5 bar      | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 46 | G 3/4" | 8.6 bar      | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 47 | G 3/4" | 8.8 bar      | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 48 | G 3/4" | 9.0 bar      | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 49 | G 3/4" | 9.3 bar      | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 50 | G 3/4" | 9.5 bar      | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 02 | G 3/4" | 10.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 03 | G 3/4" | 10.5 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 04 | G 3/4" | 10.6 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 05 | G 3/4" | 11.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 06 | G 3/4" | 11.5 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 07 | G 3/4" | 12.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 08 | G 3/4" | 12.5 bar     | 15,0    | 153,0  | 79 - 1172 Nm3/h  | 36      |
| K- 07 30 17 09 | G 3/4" | 13.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 10 | G 3/4" | 14.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 11 | G 3/4" | 14.2 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 12 | G 3/4" | 14.5 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 13 | G 3/4" | 15.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 14 | G 3/4" | 15.5 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 15 | G 3/4" | 15.8 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 16 | G 3/4" | 16.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 17 | G 3/4" | 16.5 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 18 | G 3/4" | 17.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 19 | G 3/4" | 17.5 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 20 | G 3/4" | 18.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 21 | G 3/4" | 18.5 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 22 | G 3/4" | 19.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 23 | G 3/4" | 19.5 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 28 | G 3/4" | 20.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 29 | G 3/4" | 21.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 30 | G 3/4" | 22.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 31 | G 3/4" | 25.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 34 | G 3/4" | 30.0 bar     | 15,0    | 153,0  | -                | 36      |
| K- 07 30 17 51 | G 1"   | 0.5 bar      | 20,0    | 185,0  | 213 - 3148 Nm3/h | 41      |
| K- 07 30 17 52 | G 1"   | 0.6 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 53 | G 1"   | 0.7 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 54 | G 1"   | 0.8 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 55 | G 1"   | 0.9 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 56 | G 1"   | 1.0 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 57 | G 1"   | 1.2 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 58 | G 1"   | 1.3 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 59 | G 1"   | 1.5 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 60 | G 1"   | 1.6 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 61 | G 1"   | 1.7 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 62 | G 1"   | 1.8 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 81 | G 1"   | 2.0 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 82 | G 1"   | 2.2 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 83 | G 1"   | 2.3 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 84 | G 1"   | 2.5 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 85 | G 1"   | 2.7 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 86 | G 1"   | 2.9 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 92 | G 1"   | 3.0 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 93 | G 1"   | 3.2 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 94 | G 1"   | 3.4 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 95 | G 1"   | 3.5 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 96 | G 1"   | 3.9 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 98 | G 1"   | 4.0 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 99 | G 1"   | 4.5 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 00 | G 1"   | 4.7 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 01 | G 1"   | 5.0 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 02 | G 1"   | 5.4 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 03 | G 1"   | 5.5 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 04 | G 1"   | 5.7 bar      | 20,0    | 185,0  | -                | 41      |



Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.

16.07.2024

HANSA-FLEX AG

www.hansa-flex.com

3

# K-HOCHLEIST SICHERHEITSVEN

High-pressure safety valves

**HANSA FLEX**

## Artikel

| Opis           | Navoj    | Vklopni tlak | do (mm) | H (mm) | moč              | SW (mm) |
|----------------|----------|--------------|---------|--------|------------------|---------|
| K- 07 30 18 05 | G 1"     | 6.0 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 06 | G 1"     | 6.2 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 07 | G 1"     | 6.3 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 08 | G 1"     | 6.5 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 09 | G 1"     | 6.6 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 10 | G 1"     | 6.9 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 11 | G 1"     | 7.0 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 12 | G 1"     | 7.2 bar      | -       | -      | -                | -       |
| K- 07 30 18 13 | G 1"     | 7.5 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 14 | G 1"     | 7.6 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 15 | G 1"     | 7.8 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 16 | G 1"     | 8.0 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 17 | G 1"     | 8.2 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 18 | G 1"     | 8.5 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 19 | G 1"     | 8.8 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 20 | G 1"     | 9.0 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 21 | G 1"     | 9.2 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 22 | G 1"     | 9.5 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 23 | G 1"     | 9.8 bar      | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 63 | G 1"     | 10.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 64 | G 1"     | 10.5 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 65 | G 1"     | 11.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 66 | G 1"     | 11.5 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 67 | G 1"     | 12.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 68 | G 1"     | 12.5 bar     | 20,0    | 185,0  | 213 - 3148 Nm3/h | 41      |
| K- 07 30 17 69 | G 1"     | 13.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 70 | G 1"     | 13.5 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 71 | G 1"     | 14.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 72 | G 1"     | 14.5 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 73 | G 1"     | 14.8 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 74 | G 1"     | 15.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 75 | G 1"     | 15.3 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 76 | G 1"     | 15.5 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 77 | G 1"     | 16.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 78 | G 1"     | 16.5 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 79 | G 1"     | 17.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 80 | G 1"     | 18.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 87 | G 1"     | 20.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 88 | G 1"     | 21.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 89 | G 1"     | 25.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 90 | G 1"     | 27.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 91 | G 1"     | 28.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 17 97 | G 1"     | 30.0 bar     | 20,0    | 185,0  | -                | 41      |
| K- 07 30 18 24 | G 1 1/4" | 0.5 bar      | 25,0    | 231,0  | 334 - 4930 Nm3/h | 50      |
| K- 07 30 18 25 | G 1 1/4" | 0.7 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 26 | G 1 1/4" | 0.9 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 27 | G 1 1/4" | 1.0 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 28 | G 1 1/4" | 1.2 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 29 | G 1 1/4" | 1.3 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 30 | G 1 1/4" | 1.5 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 31 | G 1 1/4" | 1.8 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 47 | G 1 1/4" | 2.0 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 48 | G 1 1/4" | 2.1 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 49 | G 1 1/4" | 2.2 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 50 | G 1 1/4" | 2.5 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 54 | G 1 1/4" | 3.0 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 55 | G 1 1/4" | 3.1 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 56 | G 1 1/4" | 5.0 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 57 | G 1 1/4" | 5.7 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 58 | G 1 1/4" | 6.0 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 59 | G 1 1/4" | 6.6 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 60 | G 1 1/4" | 6.8 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 61 | G 1 1/4" | 7.0 bar      | 25,0    | 231,0  | -                | 50      |



Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.

16.07.2024

HANSA-FLEX AG

www.hansa-flex.com

4

# K-HOCHLEIST SICHERHEITSVEN

High-pressure safety valves

**HANSA FLEX**

| Artikel        | Opis | Navoj    | Vklopni tlak | do (mm) | H (mm) | moč              | SW (mm) |
|----------------|------|----------|--------------|---------|--------|------------------|---------|
| K- 07 30 18 62 |      | G 1 1/4" | 7.5 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 63 |      | G 1 1/4" | 7.7 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 64 |      | G 1 1/4" | 8.0 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 65 |      | G 1 1/4" | 8.2 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 66 |      | G 1 1/4" | 8.5 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 67 |      | G 1 1/4" | 8.8 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 68 |      | G 1 1/4" | 9.0 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 69 |      | G 1 1/4" | 9.3 bar      | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 32 |      | G 1 1/4" | 10.0 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 33 |      | G 1 1/4" | 10.5 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 34 |      | G 1 1/4" | 11.0 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 35 |      | G 1 1/4" | 11.5 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 36 |      | G 1 1/4" | 11.8 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 37 |      | G 1 1/4" | 12.0 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 38 |      | G 1 1/4" | 13.0 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 39 |      | G 1 1/4" | 13.2 bar     | 25,0    | 231,0  | 334 - 4930 Nm3/h | 50      |
| K- 07 30 18 40 |      | G 1 1/4" | 14.0 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 41 |      | G 1 1/4" | 14.5 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 42 |      | G 1 1/4" | 15.0 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 43 |      | G 1 1/4" | 16.0 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 44 |      | G 1 1/4" | 17.0 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 45 |      | G 1 1/4" | 17.5 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 46 |      | G 1 1/4" | 18.0 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 51 |      | G 1 1/4" | 20.0 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 52 |      | G 1 1/4" | 23.0 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 53 |      | G 1 1/4" | 25.0 bar     | 25,0    | 231,0  | -                | 50      |
| K- 07 30 18 70 |      | G 1 1/2" | 0.5 bar      | 32,0    | 293,0  | 546 - 8060 Nm3/h | 60      |
| K- 07 30 18 71 |      | G 1 1/2" | 0.6 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 72 |      | G 1 1/2" | 0.8 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 73 |      | G 1 1/2" | 0.9 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 74 |      | G 1 1/2" | 1.0 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 75 |      | G 1 1/2" | 1.2 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 76 |      | G 1 1/2" | 1.5 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 87 |      | G 1 1/2" | 2.0 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 88 |      | G 1 1/2" | 2.1 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 89 |      | G 1 1/2" | 2.3 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 90 |      | G 1 1/2" | 2.5 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 91 |      | G 1 1/2" | 2.6 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 93 |      | G 1 1/2" | 3.0 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 94 |      | G 1 1/2" | 3.2 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 95 |      | G 1 1/2" | 3.3 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 96 |      | G 1 1/2" | 3.5 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 97 |      | G 1 1/2" | 3.7 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 98 |      | G 1 1/2" | 3.9 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 99 |      | G 1 1/2" | 4.0 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 00 |      | G 1 1/2" | 4.2 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 01 |      | G 1 1/2" | 4.5 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 02 |      | G 1 1/2" | 5.0 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 03 |      | G 1 1/2" | 5.5 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 04 |      | G 1 1/2" | 6.0 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 05 |      | G 1 1/2" | 6.5 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 06 |      | G 1 1/2" | 6.8 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 07 |      | G 1 1/2" | 7.0 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 08 |      | G 1 1/2" | 8.0 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 09 |      | G 1 1/2" | 8.2 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 10 |      | G 1 1/2" | 8.4 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 11 |      | G 1 1/2" | 8.5 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 12 |      | G 1 1/2" | 8.6 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 13 |      | G 1 1/2" | 8.8 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 14 |      | G 1 1/2" | 9.0 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 15 |      | G 1 1/2" | 9.3 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 19 16 |      | G 1 1/2" | 9.5 bar      | 32,0    | 293,0  | -                | 60      |
| K- 07 30 18 78 |      | G 1 1/2" | 10.0 bar     | 32,0    | 293,0  | -                | 60      |



Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.

16.07.2024

HANSA-FLEX AG

[www.hansa-flex.com](http://www.hansa-flex.com)

# K-HOCHLEIST SICHERHEITSVEN

High-pressure safety valves

**HANSA FLEX**

| Artikel        | Opis     | Navoj    | Vklopni tlak | do (mm) | H (mm)            | moč | SW (mm) |
|----------------|----------|----------|--------------|---------|-------------------|-----|---------|
| K- 07 30 18 79 | G 1 1/2" | 10.4 bar | 32,0         | 293,0   | -                 | 60  |         |
| K- 07 30 18 80 | G 1 1/2" | 10.5 bar | 32,0         | 293,0   | -                 | 60  |         |
| K- 07 30 18 81 | G 1 1/2" | 11.0 bar | 32,0         | 293,0   | -                 | 60  |         |
| K- 07 30 18 82 | G 1 1/2" | 12.0 bar | 32,0         | 293,0   | -                 | 60  |         |
| K- 07 30 18 83 | G 1 1/2" | 15.0 bar | 32,0         | 293,0   | 546 - 8060 Nm3/h  | 60  |         |
| K- 07 30 18 84 | G 1 1/2" | 16.0 bar | 32,0         | 293,0   | -                 | 60  |         |
| K- 07 30 18 85 | G 1 1/2" | 17.0 bar | 32,0         | 293,0   | -                 | 60  |         |
| K- 07 30 18 86 | G 1 1/2" | 19.0 bar | 32,0         | 293,0   | -                 | 60  |         |
| K- 07 30 18 92 | G 1 1/2" | 20.0 bar | 32,0         | 293,0   | -                 | 60  |         |
| K- 07 30 19 17 | G 2"     | 0.5 bar  | 40,0         | 367,0   | 855 - 12615 Nm3/h | 80  |         |
| K- 07 30 19 18 | G 2"     | 0.8 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 19 | G 2"     | 0.9 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 20 | G 2"     | 1.0 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 21 | G 2"     | 1.3 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 22 | G 2"     | 1.5 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 23 | G 2"     | 1.6 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 24 | G 2"     | 1.8 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 38 | G 2"     | 2.0 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 39 | G 2"     | 2.1 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 40 | G 2"     | 2.5 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 41 | G 2"     | 2.6 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 42 | G 2"     | 2.8 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 44 | G 2"     | 3.0 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 45 | G 2"     | 3.5 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 46 | G 2"     | 3.7 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 47 | G 2"     | 3.8 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 48 | G 2"     | 3.9 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 49 | G 2"     | 4.0 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 50 | G 2"     | 4.5 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 51 | G 2"     | 4.8 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 52 | G 2"     | 5.0 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 53 | G 2"     | 5.5 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 54 | G 2"     | 6.0 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 55 | G 2"     | 6.4 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 56 | G 2"     | 6.8 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 57 | G 2"     | 7.0 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 58 | G 2"     | 7.2 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 59 | G 2"     | 7.5 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 60 | G 2"     | 8.0 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 61 | G 2"     | 8.5 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 62 | G 2"     | 8.8 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 63 | G 2"     | 9.0 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 64 | G 2"     | 9.3 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 65 | G 2"     | 9.5 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 66 | G 2"     | 9.7 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 67 | G 2"     | 9.8 bar  | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 25 | G 2"     | 10.0 bar | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 26 | G 2"     | 10.2 bar | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 27 | G 2"     | 10.5 bar | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 28 | G 2"     | 11.0 bar | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 29 | G 2"     | 12.0 bar | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 30 | G 2"     | 13.0 bar | 40,0         | 367,0   | 855 - 12615 Nm3/h | 80  |         |
| K- 07 30 19 31 | G 2"     | 14.0 bar | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 32 | G 2"     | 15.0 bar | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 33 | G 2"     | 16.0 bar | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 34 | G 2"     | 17.0 bar | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 35 | G 2"     | 17.6 bar | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 36 | G 2"     | 18.0 bar | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 37 | G 2"     | 19.0 bar | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 19 43 | G 2"     | 20.0 bar | 40,0         | 367,0   | -                 | 80  |         |
| K- 07 30 18 77 | G 1 1/2" | 1.8 bar  | 32,0         | 293,0   | -                 | 60  |         |