



K-T-STUECKE IG AG IG 2 2

Tees, female-male-female

HANSA FLEX

Lastnosti

| | |
|---------------------|---------------------------------|
| Obratovalni tlak | 60 bar |
| delovna temperatura | Max. 150 °C |
| notranji navoj | Parallel to DIN EN ISO 228-1 |
| Material: | Brass with a bare metal surface |
| zunanji navoj | conical acc. DIN 2999 |

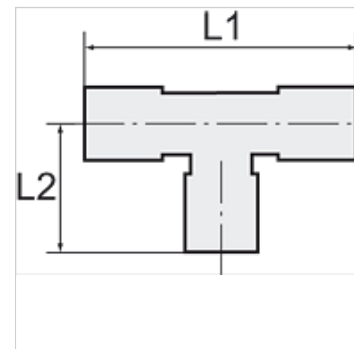

Navodilo

Drugi podatki na zahtevo.

Artikel

| Opis | Navoj | L1 (mm) | L2 (mm) | zev ključa |
|----------------|---------|------------|------------|------------|
| K- 07 40 11 62 | G/R 1/8 | 42,0 | 18,5 | 10 mm |
| K- 07 40 11 63 | G/R 1/4 | 51,0 | 23,5 | 13 mm |
| K- 07 40 11 64 | G/R 3/8 | 56,0 | 26,0 | 17 mm |
| K- 07 40 11 65 | G/R 1/2 | 67,0 | 31,0 | 21 mm |
| K- 07 40 11 66 | G/R 3/4 | 73,0 | 33,0 | 25 mm |
| K- 07 40 11 67 | G/R 1 | 90,0 | 39,0 | 30 mm |