


K-XV 6-KANT

Double nipples, hexagonal

HANSA FLEX

Lastnosti

| | |
|---------------|------------------------------|
| delovni tlak | Max. 20 bar |
| zunANJI navoj | Parallel to DIN EN ISO 228-1 |
| Material: | Stainless steel 1.4408 |

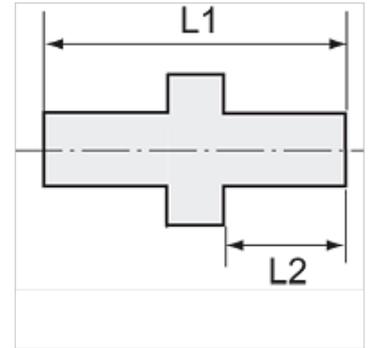

Navodilo

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Drugi podatki na zahtevo.

Artikel

| Opis | Navoj | L1 (mm) | L2 (mm) | zev ključa |
|----------------|---------|------------|------------|------------|
| K- 07 40 12 18 | G 1/8 | 30,0 | 12,0 | 13 mm |
| K- 07 40 12 19 | G 1/4 | 32,0 | 13,0 | 16 mm |
| K- 07 40 12 20 | G 3/8 | 34,0 | 13,0 | 20 mm |
| K- 07 40 12 21 | G 1/2 | 37,5 | 15,0 | 24 mm |
| K- 07 40 12 22 | G 3/4 | 46,0 | 18,0 | 29 mm |
| K- 07 40 12 23 | G 1 | 51,0 | 19,0 | 35 mm |
| K- 07 40 12 24 | G 1 1/4 | 57,0 | 22,0 | 46 mm |
| K- 07 40 12 25 | G 1 1/2 | 58,0 | 23,0 | 51 mm |
| K- 07 40 12 26 | G 2 | 66,9 | 26,0 | 63 mm |