


# K-SCHALLDAE SINTERBR AG 560

Silencers, sintered bronze, flat type with male thread, 560 Series

**HANSA FLEX**

## Lastnosti

|                     |                                   |
|---------------------|-----------------------------------|
| Obratovalni tlak    | maks. 10 bar                      |
| delovna temperatura | -10 °C to +250 °C                 |
| Standard            | G thread acc. to DIN EN ISO 228-1 |

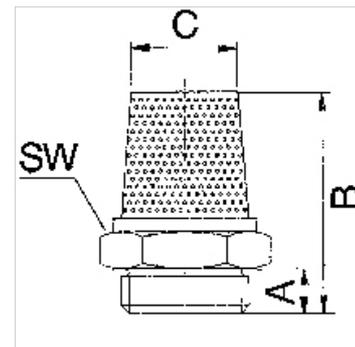

## Navodilo

Drugi podatki na zahtevo.

## Opis

For reducing the exhaust noise generated by pneumatic equipment.

## Artikel

| Opis           | Navoj | B<br>(mm) | C<br>(mm) |
|----------------|-------|-----------|-----------|
| K- 07 40 34 87 | G 1/8 | 6,0       | 6,0       |
| K- 07 40 34 88 | G 1/4 | 6,0       | 8,0       |
| K- 07 40 34 89 | G 3/8 | 6,5       | 10,0      |
| K- 07 40 34 90 | G 1/2 | 8,0       | 12,0      |
| K- 07 40 34 91 | G 3/4 | 10,5      | 20,0      |
| K- 07 40 34 92 | G 1   | 9,5       | 26,0      |