



K-GAR IG

Female connectors with female G thread

HANSA FLEX

Lastnosti

Obratovalni tlak	Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 60 °C)
navojno ohišje	Polyamide (PA)
zatični obroč	Polypropylene (PP)
matica	Polypropylene (PP)

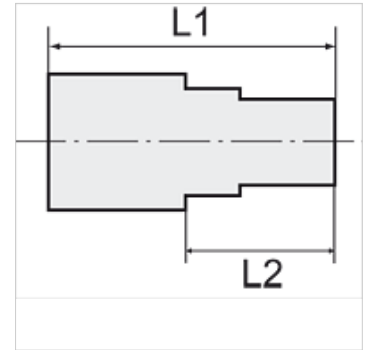

Navodilo

Drugi podatki na zahtevo.

Opis

Manufactured from high impact-resistant, UV-stabilised engineering plastic, extremely resistant to weathering. Good chemical resistance to benzine, diesel oil, fuel oil and alkalis.
Not suitable for use with acids.

Artikel

Opis	Navoj	za cev	L1 (mm)	L2 (mm)	zav ključa
K- 07 40 32 46	G 1/8	4 mm / 6 mm	31,0	17,0	14 mm
K- 07 40 32 47	G 1/8	6 mm / 8 mm	36,0	21,0	17 mm
K- 07 40 32 48	G 1/8	8 mm / 10 mm	39,0	24,0	19 mm
K- 07 40 32 49	G 1/8	9 mm / 12 mm	43,0	28,0	22 mm
K- 07 40 32 50	G 1/4	4 mm / 6 mm	36,0	17,0	17 mm
K- 07 40 32 51	G 1/4	6 mm / 8 mm	41,0	21,0	17 mm
K- 07 40 32 52	G 1/4	8 mm / 10 mm	44,0	24,0	19 mm
K- 07 40 32 53	G 1/4	9 mm / 12 mm	48,0	28,0	22 mm
K- 07 40 32 54	G 3/8	4 mm / 6 mm	36,0	17,0	22 mm
K- 07 40 32 55	G 3/8	6 mm / 8 mm	41,0	21,0	22 mm
K- 07 40 32 56	G 3/8	8 mm / 10 mm	44,0	24,0	22 mm
K- 07 40 32 57	G 3/8	9 mm / 12 mm	48,0	28,0	22 mm
K- 07 40 32 58	G 1/2	4 mm / 6 mm	38,0	17,0	27 mm
K- 07 40 32 59	G 1/2	6 mm / 8 mm	42,0	21,0	27 mm
K- 07 40 32 60	G 1/2	8 mm / 10 mm	44,0	24,0	27 mm
K- 07 40 32 61	G 1/2	9 mm / 12 mm	49,0	28,0	27 mm