


K-SDR DREH AG

Banjo elbows, swivel type, parallel male thread

HANSA FLEX

Lastnosti

Obratovalni tlak	Max. 16 bar (at +20 °C)
delovna temperatura	-20 °C to +70 °C
Material:	ponikljana medenina
potisni obroč	Hostaform (black nickel-plated for Ø 10, 12)
tesnilni obroč	NBR, siliconefree
vpenjalne kleščice	Stainless steel AISI 316

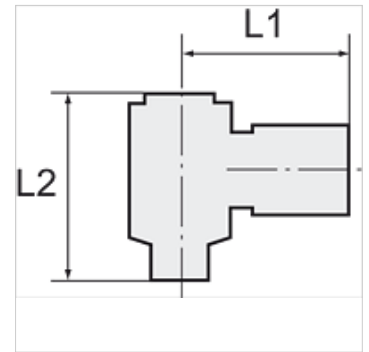

Navodilo

Drugi podatki na zahtevo.

Opis

Economy yet very high-quality series of push-in fittings made of nickel-plated brass. Compact, space-saving, lightweight design. An O-ring in the fillet at the end of the thread guarantees a tight connection for all male thread parts, even on rough surfaces.

Artikel

Opis	Navoj	za zunanji Ø mm cevi	L1 (mm)	L2 (mm)
K- 07 40 29 88	M 5	4 mm	18,5	17,0
K- 07 40 29 91	G 1/8	4 mm	21,0	25,0
K- 07 40 29 92	G 1/8	6 mm	23,5	25,0
K- 07 40 29 93	G 1/8	8 mm	24,5	25,0
K- 07 40 29 89	G 1/4	6 mm	24,5	29,3
K- 07 40 29 90	G 1/4	8 mm	26,0	29,3