
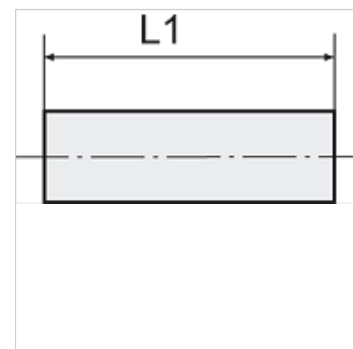


K-MUFFEN SK MS NI

Sockets with outer hex - nickel-plated brass

Lastnosti

| | |
|---------------------|---------------------|
| delovna temperatura | Max. 150 °C |
| tlak | Max. 60 bar |
| Material: | ponikljana medenina |



Navodilo

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Drugi podatki na zahtevo.

Opis

Suitable for air, water, oil, steam, etc.

Dodatne informacije

Further types and dimensions on request.

Artikel

| Opis | Navoj | L1 (mm) | zev ključa |
|----------------|-------|------------|------------|
| K- 07 40 15 06 | M 5 | 11,0 | 8 mm |
| K- 07 40 15 07 | G 1/8 | 15,0 | 14 mm |
| K- 07 40 15 08 | G 1/4 | 22,0 | 17 mm |
| K- 07 40 15 09 | G 3/8 | 24,0 | 22 mm |
| K- 07 40 15 11 | G 1/2 | 30,0 | 27 mm |
| K- 07 40 15 10 | G 3/4 | 32,0 | 32 mm |
| K- 07 40 15 12 | G 1 | 35,0 | 38 mm |