
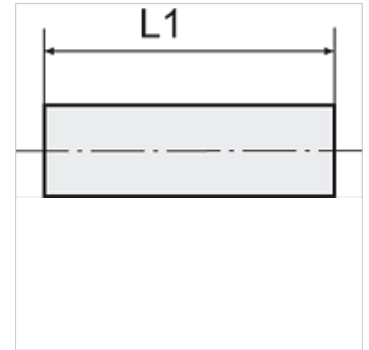


# K-MUFFEN SK MS NI

Sockets with outer hex - nickel-plated brass

## Lastnosti

delovna temperatura	Max. 150 °C
tlak	Max. 60 bar
Material:	ponikljana medenina



## Navodilo

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.  
Drugi podatki na zahtevo.

## Opis

Suitable for air, water, oil, steam, etc.

## Dodatne informacije

Further types and dimensions on request.

## Artikel

Opis	Navoj	L1 (mm)	zev ključa
K- 07 40 15 06	M 5	11,0	8 mm
K- 07 40 15 07	G 1/8	15,0	14 mm
K- 07 40 15 08	G 1/4	22,0	17 mm
K- 07 40 15 09	G 3/8	24,0	22 mm
K- 07 40 15 11	G 1/2	30,0	27 mm
K- 07 40 15 10	G 3/4	32,0	32 mm
K- 07 40 15 12	G 1	35,0	38 mm