
# K-SV MS NI

Bulkhead connectors - nickel-plated brass

## Lastnosti

| | |
|---|---|
| **delovna temperatura** | Max. 150 °C |
| **tlak** | Max. 60 bar |
| **Material:** | ponikljana medenina |



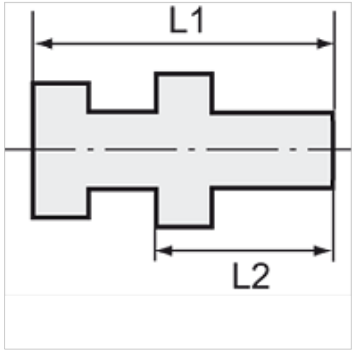


## Navodilo

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Drugi podatki na zahtevo.

## Opis

Suitable for air, water, oil, steam, etc.

## Dodatne informacije

Further types and dimensions on request.

## Artikel

| Opis | zunanji navoj | notranji navoj | L1 (mm) | L2 (mm) | zev ključa 1 (mm) | zev ključa 2 (mm) |
|---|---|---|---|---|---|---|
| **K- 07 40 34 27** | M 16 x 1.5 | G 1/8 | 18,0 | 14,0 | 22 | 19 |
| **K- 07 40 34 28** | M 20 x 1.5 | G 1/4 | 26,0 | 21,0 | 24 | 27 |
| **K- 07 40 34 29** | M 26 x 1.5 | G 3/8 | 26,0 | 21,0 | 32 | 30 |
| **K- 07 40 34 30** | M 28 x 1.5 | G 1/2 | 33,5 | 27,0 | 32 | 36 |

*Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.*