


# K-SV MS NI

Bulkhead connectors - nickel-plated brass

**HANSA FLEX**

## Lastnosti

delovna temperatura	Max. 150 °C
tlak	Max. 60 bar
Material:	ponikljana medenina

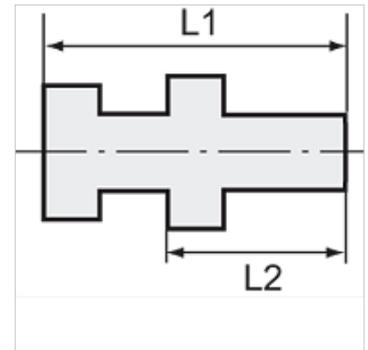

## Navodilo

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.  
Drugi podatki na zahtevo.

## Opis

Suitable for air, water, oil, steam, etc.

## Dodatne informacije

Further types and dimensions on request.

## Artikel

Opis	zunanj navoj	notranji navoj	L1 (mm)	L2 (mm)	zev ključa 1 (mm)	zev ključa 2 (mm)
K- 07 40 34 27	M 16 x 1.5	G 1/8	18,0	14,0	22	19
K- 07 40 34 28	M 20 x 1.5	G 1/4	26,0	21,0	24	27
K- 07 40 34 29	M 26 x 1.5	G 3/8	26,0	21,0	32	30
K- 07 40 34 30	M 28 x 1.5	G 1/2	33,5	27,0	32	36