

# K-VT 2-FACH MS NI


Distributors, 2 outlets, nickel-plated brass

**HANSA FLEX**

## Lastnosti

Obratovni tlak maks. 10 bar

Material: ponikljana medenina

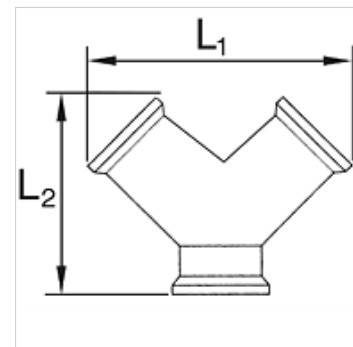

## Navodilo

Drugi podatki na zahtevo.

## Artikel

| Opis           | Navoj        | Outlets    | L1<br>(mm) | L2<br>(mm) |
|----------------|--------------|------------|------------|------------|
| K- 07 40 40 14 | G 1/8 male   | 2 x female | 29,0       | 32,0       |
| K- 07 40 40 15 | G 1/4 male   | 2 x female | 36,0       | 38,0       |
| K- 07 40 45 63 | G 3/8 male   | 2 x female | 41,0       | 42,5       |
| K- 07 40 45 62 | G 1/2 male   | 2 x female | 53,0       | 53,0       |
| K- 07 40 45 66 | G 1/8 female | 2 x female | 29,0       | 26,5       |
| K- 07 40 40 82 | G 1/4 female | 2 x female | 36,0       | 32,0       |
| K- 07 40 40 85 | G 3/8 female | 2 x female | 41,0       | 37,0       |
| K- 07 40 40 86 | G 1/2 female | 2 x female | 53,0       | 45,0       |