

K-VTL KUGELHAEHNE

Distributor block

Lastnosti

Pritrditev	2 mounting holes in housing (screw size M 5)
tlačno območje	Max. +10 bar, rough vacuum
območje temperatur:	-10 °C to +100 °C
navoj krogelne pipe	G 1/4
ohišje	Die-cast aluminium
krogla, vreteno	Ms 58, chrome-plated
tesnilo krogle	PTFE
tesnilni obroč	NBR



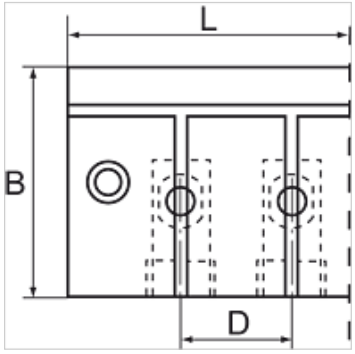

Navodilo

Drugi podatki na zahtevo.

Opis

Distributor and isolator block for machines and installations where it is necessary to close individual circuits. This block contains 6, 8 or 10 ball valves that can be adjusted using a screwdriver.
Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

Artikel

Opis	število krogelnih pip	Navoj izhod	Navoj vhod	B (mm)	D (mm)	L (mm)
K- 07 40 40 46	6	G 3/8	G 3/8"	52,0	25,0	175,0
K- 07 40 40 47	8	G 3/8	G 3/8"	52,0	25,0	225,0
K- 07 40 40 45	10	G 3/8	G 3/8"	52,0	25,0	275,0

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.