


# K-PROP VENTIL LU GA 24 V DC

Proportional valves for controlling the flow of air / gas, 24 VDC, closed when de-energised

**HANSA FLEX**

## Lastnosti

območje temperatur:	Max. 50 °C (G 1/8), Max. 90 °C (G 1/4, G 3/8)
Sredstva	Air, neutral gases, water, oil
tlačno območje	Vacuum (max. 8 bar)
krmiljenje	Via plug amplifier 0 to 10 V, 0 to 20 mA, 4 to 20 mA
vedenje Failsafe	Tight closure in case of loss of voltage
ohišje, sedež ventila	Brass
notranji deli	Stainless steel
krožnik ventila	FKM
tesnilni material	FKM

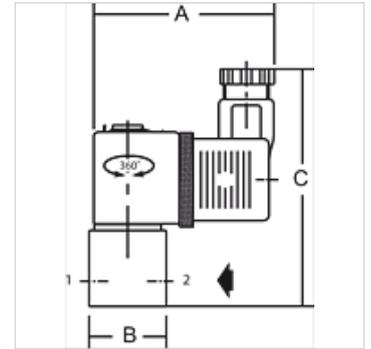

## Navodilo

Drugi podatki na zahtevo.

## Opis

Ever increasing requirements with regard to quality, precision, productivity, convenience, user friendliness and service represent tough challenges for industrial plant and production facilities. These challenges can only be mastered if physical quantities such as temperature, pressure, force, speed, torque, etc. are optimally adapted to the operating conditions of each installation. Stepless adjustment of these parameters is vital.

Proportional valves allow the medium to be varied as a function of an electronic input variable. By linking these valves to the electronics, it is possible to improve their accuracy and broaden their range of applications. A pressure regulator, for instance, needs to be suitable for several pressure ranges without having to adjust the pressure manually. Proportional valves control the output pressure in a closed control loop proportionally to the selected setpoint signal. This output pressure, in other words, is continually compared with the specified setpoint and automatically adjusted according to actual parameter values.

## Dodatne informacije

We recommend combining these proportional valves with a plug amplifier, type K-07250999 or K-07251000

We recommend combining these proportional valves with a plug amplifier, type K-07250999 or K-07251000

## Artikel

Opis	Priključek	DN	maks. delovna tlačna razlika (bar)	A (mm)	B	C (mm)
K- 07 25 09 91	G 1/4	2	8	85,0	40,0 mm	95,0
K- 07 25 09 92	G 1/4	3	4	85,0	40,0 mm	95,0
K- 07 25 09 93	G 3/8	6	1	85,0	48,0 mm	97,0
K- 07 25 09 94	G 3/8	7	1	85,0	48,0 mm	97,0