


K-GROSSDRUCKREGLER

Large pressure regulators

HANSA FLEX

Lastnosti

vstopni tlak	Max. 40 bar
temperatura medija	max. 60 °C
temperatura okolice	Max. 90 °C
pretok	2500 l/min
tesnilni material	NBR
ohišje	Aluminium
meritev pretoka	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar

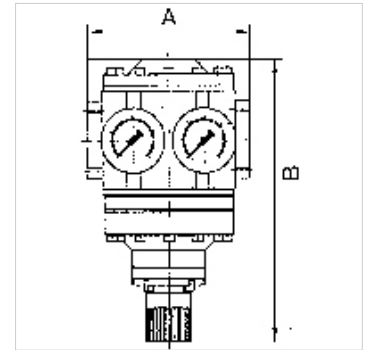

Navodilo

Drugi podatki na zahtevo.

Opis

Diaphragm pressure regulators, independent of inlet pressure, with internal pilot control and self-relieving design. Separate indication of input and working pressure on two pressure gauges. The pressure setting can be locked by pushing the button down. We recommend always using these controllers in conjunction with our K-07250615 and K-07250615 filters.

Artikel

Opis	Navoj	regulacijsko območje	A (mm)	B	DN
K- 07 25 08 11	G 1 1/2	0.5 - 6 bar	180,0	246,0 mm	50
K- 07 25 08 12	G 1 1/2	0.5 - 10 bar	180,0	246,0 mm	50
K- 07 25 08 13	G 1 1/2	0.5 - 16 bar	180,0	246,0 mm	50
K- 07 25 08 14	G 1 1/2	0.5 - 25 bar	180,0	246,0 mm	50
K- 07 25 08 15	G 2	0.5 - 6 bar	160,0	246,0 mm	50
K- 07 25 08 16	G 2	0.5 - 10 bar	160,0	246,0 mm	50
K- 07 25 08 17	G 2	0.5 - 16 bar	160,0	246,0 mm	50
K- 07 25 08 18	G 2	0.5 - 25 bar	160,0	246,0 mm	50

Nadomestni deli

K-HALTERBAUSATZ	Holder
K-VERSCHLEI-SATZ	Set of wearing parts
K-XV AGM 2	Double nipples, parallel male thread