


# K-HOCHLEIST DRUCKREGLER

Heavy-duty pressure regulators

**HANSA FLEX**

## Lastnosti

|                     |  |
|---------------------|--|
| vstopni tlak        | Max. 25 bar  |
| temperatura medija  | max. 60 °C   |
| temperatura okolice | Max. 60 °C   |
| pretok              | 50000 l/min  |
| tesnilni material   | NBR  |
| ohišje              | Aluminium, painted silver                                      |
| meritev pretoka     | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

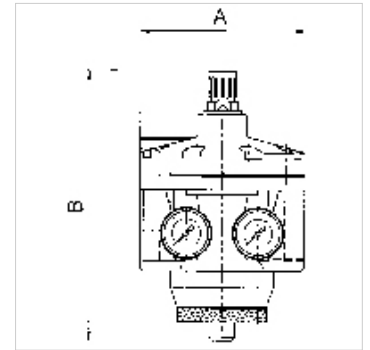

## Navodilo

Drugi podatki na zahtevo.

## Opis

Diaphragm pressure regulators, independent of inlet pressure, with internal pilot control and self-relieving design for very high flow rates. Separate indication of input and working pressure on two pressure gauges. The pressure setting can be locked by pushing the knob down. We recommend always using these controllers in conjunction with our K-07250607 and K-07250609 filters.

## Artikel

| Opis           | Navoj   | regulacijsko območje | A<br>(mm) | B        | DN |
|----------------|---------|----------------------|-----------|----------|----|
| K- 07 25 08 03 | G 1 1/2 | 0.1 - 3 bar          | 188,0     | 261,0 mm | 50 |
| K- 07 25 08 04 | G 1 1/2 | 0.2 - 6 bar          | 188,0     | 261,0 mm | 50 |
| K- 07 25 08 05 | G 1 1/2 | 0.5 - 10 bar         | 188,0     | 261,0 mm | 50 |
| K- 07 25 08 06 | G 1 1/2 | 0.5 - 16 bar         | 188,0     | 261,0 mm | 50 |
| K- 07 25 08 07 | G 2     | 0.1 - 3 bar          | 160,0     | 261,0 mm | 50 |
| K- 07 25 08 08 | G 2     | 0.2 - 6 bar          | 160,0     | 261,0 mm | 50 |
| K- 07 25 08 09 | G 2     | 0.5 - 10 bar         | 160,0     | 261,0 mm | 50 |
| K- 07 25 08 10 | G 2     | 0.5 - 16 bar         | 160,0     | 261,0 mm | 50 |

## Nadomestni deli

|                            |                      |
|----------------------------|----------------------|
| K-VERSCHLEI-SATZ           | Set of wearing parts |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples       |