
K-PRAEZI DRUCKREGL PNEU FERN

Precision pressure regulators

Lastnosti

vstopni tlak	Max. 16 bar
temperatura medija	max. 60 °C
temperatura okolice	Max. 60 °C
Sredstva	Micro-filtered, unoiled compressed air (0.01 µm)
priključek za manometer	G 1/4
pretok	3000 l/min
odzračevalni priključek	G 3/8 (for mounting a silencer)
krmilni tlak	Max. 10 bar
priključek za krmilni zrak	G 1/8
tesnilni material	NBR
ohišje	Die-cast zinc, painted black
lastna poraba zraka	6 l/min at Pin = 16 bar



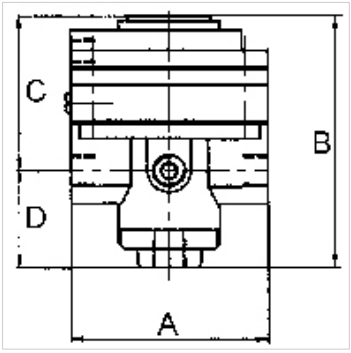

Navodilo

Attention! A set of wearing parts cannot be supplied! These pressure regulators may only opened in the factory! The given flow rates are based on the following parameters: 3000 l/min: P1: 5 bar, P2: 3 bar, Δp ≤ 0,1 bar.
Drugi podatki na zahtevo.

Opis

With high flow rate and large secondary relief port. Pneumatically controlled diaphragm pressure regulators with large secondary relief portfor applications requiring an extremely accurate working pressure, especially at high flow rates. We recommend our »multifix« series of pilot controllers.

Dodatne informacije

1500 l/min: P1: 10 bar, P2: 7 bar, Δp ≤ 0.1 bar.

Artikel

Opis	Navoj	regulacijsko območje	A (mm)	B	C (mm)	D (mm)
K- 07 25 09 35	G 1/2	0.05 - 7 bar (max. 10 bar)	82,0	108,0 mm	64,5	43,5

Nadomestni deli

K-HALTERBAUSATZ STANDARD	Holder
K-KM MS	Hexagonal lock nuts, brass
K-SCHALLDAEPFER VYON	Vyon silencers
K-FILTERELEMENT	Filter element
K-XV AGM 2	Double nipples, parallel male thread

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.