


# K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

**HANSA FLEX**

## Lastnosti

|                     |  |
|---------------------|--|
| vstopni tlak        | 1.5 - 16 bar   |
| izhodni tlak        | 0.5 - 8 bar  |
| območje temperatur: | -10 °C to +50 °C   |
| Sredstva            | stisnjen zrak  |
| finoča filtra       | 5,00 µm  |
| priključni navoj    | Material: Die-cast zinc  |
| posoda              | Polycarbonate (with bayonet lock)                                    |
| filtrirni element   | Cellpor (PE)   |
| ohišje              | Material: Grivory® (PA 66)   |
| membrana            | NBR  |
| zaščitna košara     | Polyamide  |
| kapalni nastavek    | PA   |
| lastna poraba zraka | Max. 1.5 l/min (depending on secondary pressure)                     |
| meritev pretoka     | At P1 = 10 bar, P2 = 6.3 bar and pressure drop<br>$\Delta p = 1$ bar |

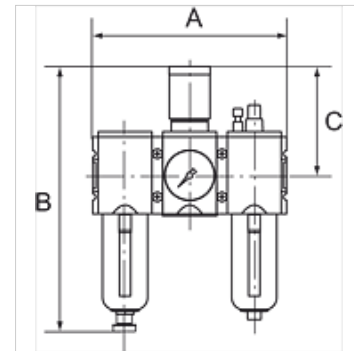

## Navodilo

Drugi podatki na zahtevo.

## Opis

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

## Navodila za naročanje

The price does not include a key lock. Please order separately.

## Artikel

| Opis           | Navoj | pretok (L/min) | A (mm) | B        | C (mm) | izpust kondenzata |
|----------------|-------|----------------|--------|----------|--------|-------------------|
| K- 07 25 14 37 | G 1/4 | 1500           | 156,0  | 225,0 mm | 95,5   | Semi              |
| K- 07 25 14 38 | G 3/8 | 1500           | 156,0  | 225,0 mm | 95,5   | Semi              |
| K- 07 25 14 39 | G 3/8 | 3500           | 189,0  | 257,0 mm | 110,0  | Semi              |
| K- 07 25 14 40 | G 1/2 | 3500           | 189,0  | 257,0 mm | 110,0  | Semi              |
| K- 07 25 14 41 | G 3/4 | 12000          | 255,0  | 329,0 mm | 137,0  | Semi              |
| K- 07 25 14 42 | G 1   | 12000          | 255,0  | 329,0 mm | 137,0  | Semi              |
| K- 07 25 14 43 | G 1/4 | 1500           | 156,0  | 243,0 mm | 95,5   | Auto              |
| K- 07 25 14 44 | G 3/8 | 1500           | 156,0  | 243,0 mm | 95,5   | Auto              |
| K- 07 25 14 45 | G 3/8 | 3500           | 189,0  | 274,0 mm | 110,0  | Auto              |
| K- 07 25 14 46 | G 1/2 | 3500           | 189,0  | 274,0 mm | 110,0  | Auto              |
| K- 07 25 14 47 | G 3/4 | 12000          | 255,0  | 343,0 mm | 137,0  | Auto              |
| K- 07 25 14 48 | G 1   | 12000          | 255,0  | 343,0 mm | 137,0  | Auto              |

## Pribor

K-STECKSCHLOSS Key lock

## Nadomestni deli

|                              |                               |
|------------------------------|-------------------------------|
| K-HALTERBAUSATZ HANSA        | Holder HANSA                  |
| K-ERSATZBEHAELTER HANSA POLY | Spare tank HANSA polycarbonat |
| K-FILTERELEMENT              | Filter element                |
| K-TROPFAUFSATZ HANSA         | Drip attachment HANSA         |
| K-SCHALTTAFELMÜTTER HANSA    | Nut HANSA                     |
| K-DICHTSATZ HANSA            | Set of seals HANSA            |