
# K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

## Lastnosti

| | |
|---|---|
| **vstopni tlak** | 1.5 - 16 bar |
| **izhodni tlak** | 0.5 - 8 bar |
| **območje temperatur:** | -10 °C to +50 °C |
| **Sredstva** | stisnjen zrak |
| **finoča filtra** | 5,00 µm |
| **priključni navoj** | Material: Die-cast zinc |
| **posoda** | Polycarbonate (with bayonet lock) |
| **filtrirni element** | Cellpor (PE) |
| **ohišje** | Material: Grivory® (PA 66) |
| **membrana** | NBR |
| **zaščitna košara** | Polyamide |
| **kapalni nastavek** | PA |
| **lastna poraba zraka** | Max. 1.5 l/min (depending on secondary pressure) |
| **meritev pretoka** | At P1 = 10 bar, P2 = 6.3 bar and pressure drop Δp = 1 bar |



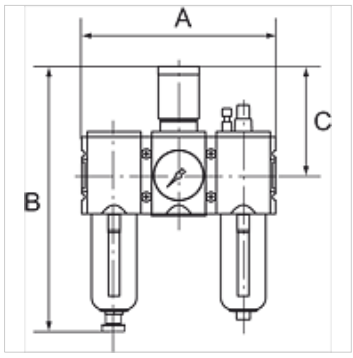


## Navodilo

Drugi podatki na zahtevo.

## Opis

Two or three-piece service units with excellent flow rates in modern design. <br>Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.<br>

## Navodila za naročanje

The price does not include a key lock. Please order separately.

## Artikel

| Opis | Navoj | pretok (L/min) | A (mm) | B | C (mm) | izpust kondenzata |
|---|---|---|---|---|---|---|
| **K- 07 25 14 37** | G 1/4 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| **K- 07 25 14 38** | G 3/8 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| **K- 07 25 14 39** | G 3/8 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| **K- 07 25 14 40** | G 1/2 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| **K- 07 25 14 41** | G 3/4 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| **K- 07 25 14 42** | G 1 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| | | | | | | |
| **K- 07 25 14 43** | G 1/4 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| **K- 07 25 14 44** | G 3/8 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| **K- 07 25 14 45** | G 3/8 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| **K- 07 25 14 46** | G 1/2 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| **K- 07 25 14 47** | G 3/4 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |
| **K- 07 25 14 48** | G 1 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |

## Pribor

| | |
|---|---|
| **K-STECKSCHLOSS** | Key lock |

## Nadomestni deli

| | |
|---|---|
| **K-HALTERBAUSATZ HANSA** | Holder HANSA |
| **K-ERSATZBEHAELTER HANSA POLY** | Spare tank HANSA polycarbonat |
| **K-FILTERELEMENT** | Filter element |
| **K-TROPFAUFSATZ HANSA** | Drip attachment HANSA |
| **K-SCHALTTAFELMUTTER HANSA** | Nut HANSA |
| **K-DICHTSATZ HANSA** | Set of seals HANSA |

*Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.*