


K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Lastnosti

vstopni tlak	1.5 - 16 bar
izhodni tlak	0.5 - 8 bar
območje temperatur:	-10 °C to +50 °C
Sredstva	stisnjen zrak
finoča filtra	5,00 µm
priključni navoj	Material: Die-cast zinc
posoda	Polycarbonate (with bayonet lock)
filtrirni element	Cellpor (PE)
ohišje	Material: Grivory® (PA 66)
membrana	NBR
zaščitna košara	Polyamide
kapalni nastavek	PA
lastna poraba zraka	Max. 1.5 l/min (depending on secondary pressure)
meritev pretoka	At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar

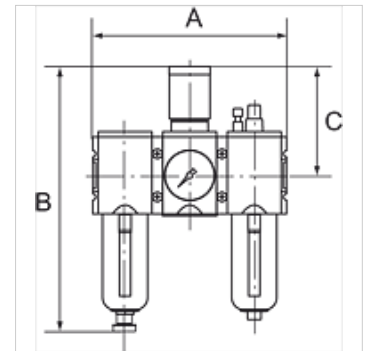

Navodilo

Drugi podatki na zahtevo.

Opis

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

Navodila za naročanje

The price does not include a key lock. Please order separately.

Artikel

Opis	Navoj	pretok (L/min)	A (mm)	B	C (mm)	izpust kondenzata
K- 07 25 14 37	G 1/4	1500	156,0	225,0 mm	95,5	Semi
K- 07 25 14 38	G 3/8	1500	156,0	225,0 mm	95,5	Semi
K- 07 25 14 39	G 3/8	3500	189,0	257,0 mm	110,0	Semi
K- 07 25 14 40	G 1/2	3500	189,0	257,0 mm	110,0	Semi
K- 07 25 14 41	G 3/4	12000	255,0	329,0 mm	137,0	Semi
K- 07 25 14 42	G 1	12000	255,0	329,0 mm	137,0	Semi
K- 07 25 14 43	G 1/4	1500	156,0	243,0 mm	95,5	Auto
K- 07 25 14 44	G 3/8	1500	156,0	243,0 mm	95,5	Auto
K- 07 25 14 45	G 3/8	3500	189,0	274,0 mm	110,0	Auto
K- 07 25 14 46	G 1/2	3500	189,0	274,0 mm	110,0	Auto
K- 07 25 14 47	G 3/4	12000	255,0	343,0 mm	137,0	Auto
K- 07 25 14 48	G 1	12000	255,0	343,0 mm	137,0	Auto

Pribor

K-STECKSCHLOSS Key lock

Nadomestni deli

K-HALTERBAUSATZ HANSA	Holder HANSA
K-ERSATZBEHAELTER HANSA POLY	Spare tank HANSA polycarbonat
K-FILTERELEMENT	Filter element
K-TROPFAUFSATZ HANSA	Drip attachment HANSA
K-SCHALTTAFELMÜTTER HANSA	Nut HANSA
K-DICHTSATZ HANSA	Set of seals HANSA