


K-FI REGL PC-BEHAEL MANO MULTIFIX

Filter regulators with polycarbonate bowl and pressure gauge

HANSA FLEX

Lastnosti

vstopni tlak	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
temperatura medija	max. 60 °C
temperatura okolice	Max. 60 °C
velikost por v filtrirnem elementu	5 µm (C55: 40 µm)
tesnilni material	NBR
vzmetni pokrov	POM-brass
ohišje	Die-cast zinc, Aluminium for G 1 variant
Drain valve	Semi-automatic
meritev pretoka	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar

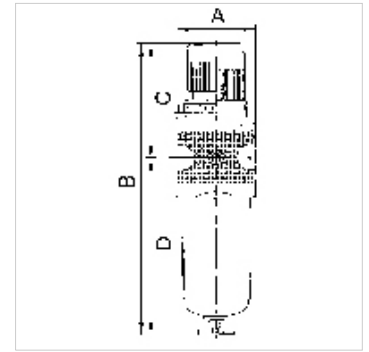

Navodilo

Drugi podatki na zahtevo.

Opis

Reversible diaphragm pressure regulators, independent of inlet pressure, with secondary ventilation, in combination with a centrifugal separator. The pressure setting can be locked by pressing in the handwheel.

Navodila za naročanje

Filter regulators with bowl guard and metal bowl are also available with control ranges of 0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar. Please ask for more information. Lockable filter regulators available on request.

Artikel

Opis	Navoj	regulacijsko območje	pretok (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Velikost
K- 07 25 00 70	G 1/4	0.1 - 3 bar	1500	47,8	192,1 mm	67,0	125,1	6	1
K- 07 25 19 40	G 1/4	0.2 - 6 bar	1500	47,8	192,1 mm	67,0	125,1	6	-
K- 07 25 00 69	G 1/4	0.5 - 10 bar	1500	47,8	192,1 mm	67,0	125,1	6	1
K- 07 25 19 39	G 1/4	0.5 - 16 bar	1500	47,8	192,1 mm	67,0	125,1	6	-
K- 07 25 00 74	G 3/8	0.1 - 3 bar	1500	47,8	192,1 mm	67,0	125,1	10	1
K- 07 25 19 42	G 3/8	0.2 - 6 bar	1500	47,8	192,1 mm	67,0	125,1	10	-
K- 07 25 00 73	G 3/8	0.5 - 10 bar	1500	47,8	192,1 mm	67,0	125,1	10	1
K- 07 25 19 41	G 3/8	0.5 - 16 bar	1500	47,8	192,1 mm	67,0	125,1	10	-
K- 07 25 00 78	G 1/2	0.1 - 3 bar	3500	68,8	246,3 mm	99,0	147,3	15	2
K- 07 25 19 44	G 1/2	0.2 - 6 bar	3500	68,8	246,3 mm	99,0	147,3	15	-
K- 07 25 00 77	G 1/2	0.5 - 10 bar	3500	68,8	246,3 mm	99,0	147,3	15	2
K- 07 25 19 43	G 1/2	0.5 - 16 bar	3500	68,8	246,3 mm	99,0	147,3	15	-
K- 07 25 00 82	G 3/4	0.1 - 3 bar	3500	68,8	246,3 mm	99,0	147,3	20	2
K- 07 25 19 46	G 3/4	0.2 - 6 bar	3500	68,8	246,3 mm	99,0	147,3	20	-
K- 07 25 00 81	G 3/4	0.5 - 10 bar	3500	68,8	246,3 mm	99,0	147,3	20	2
K- 07 25 19 45	G 3/4	0.5 - 16 bar	3500	68,8	246,3 mm	99,0	147,3	20	-
K- 07 25 00 86	G 1	0.1 - 3 bar	12000	100,0	381,8 mm	128,0	253,8	25	3
K- 07 25 19 48	G 1	0.2 - 6 bar	12000	100,0	381,8 mm	128,0	253,8	25	-
K- 07 25 00 85	G 1	0.5 - 10 bar	12000	100,0	381,8 mm	128,0	253,8	25	3
K- 07 25 19 47	G 1	0.5 - 16 bar	12000	100,0	381,8 mm	128,0	253,8	25	-

Nadomestni deli

K-HALTERBAUSATZ	Holder
K-SCHALTTAFELMUTTER	Nut
K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage



Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.

17.07.2024

HANSA-FLEX AG

www.hansa-flex.com

1

K-FI REGL PC-BEHAEL MANO MULTIFIX

Filter regulators with polycarbonate bowl and pressure gauge

HANSA FLEX