


# K-ANFAV MULTIFIX MINI

Start-up valves

**HANSA FLEX**

## Lastnosti

<b>vstopni tlak</b>	Min. 2.5 bar, max. 16 bar
<b>temperatura medija</b>	max. 60 °C
<b>temperatura okolice</b>	Max. 60 °C
<b>pretok</b>	1600 l/min
<b>tesnilni material</b>	NBR
<b>ohišje</b>	Die-cast zinc
<b>meritev pretoka</b>	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

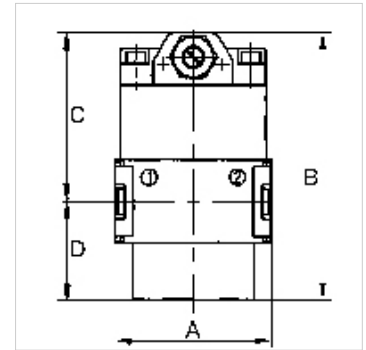

## Navodilo

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.

Drugi podatki na zahtevo.

## Opis

Seat valves operated by secondary pressure for controlled pressurisation of pneumatic systems. The full cross-section of the regulator is opened at 50% of the input pressure. With adjustable restrictor!

## Artikel

Opis	Navoj	A (mm)	B	C (mm)	D (mm)
K- 07 25 11 53	G 1/4	45,0	77,5 mm	48,5	29,0

## Pribor

K-HALTERBAUSATZ Holder

## Nadomestni deli

K-KOPPELPAKET MEHR Coupling packet