


# K-DRG DRVS MULTIFIX MINI

Pressure regulators with pressure supply at both ends

**HANSA FLEX**

## Lastnosti

|                     |                                                                |
|---------------------|----------------------------------------------------------------|
| vstopni tlak        | Max. 16 bar                                                    |
| temperatura medija  | max. 60 °C                                                     |
| temperatura okolice | Max. 60 °C                                                     |
| tesnilni material   | NBR                                                            |
| vzmetni pokrov      | POM-brass                                                      |
| ohišje              | Die-cast zinc                                                  |
| meritev pretoka     | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

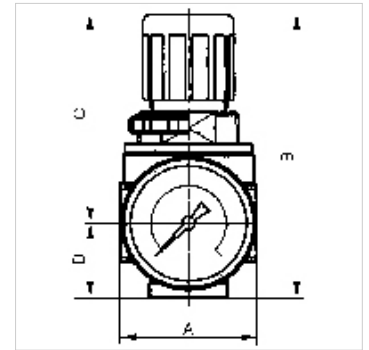

## Navodilo

Drugi podatki na zahtevo.

## Opis

Diaphragm pressure regulators with self-relieving design for mounting side by side. The pressure setting can be locked by pushing the button down.  
<br>By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line.

## Navodila za naročanje

The port for the output pressure (P2) is on the rear! K-07250028: G 1/8. Lockable pressure regulator: K-07250027. If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.

## Artikel

| Opis           | Navoj | regulacijsko območje | pretok (L/min) | A (mm) | B       | C (mm) | D (mm) | DN | Velikost |
|----------------|-------|----------------------|----------------|--------|---------|--------|--------|----|----------|
| K- 07 25 00 28 | G 1/4 | 0.1 - 3 bar          | 1200           | 40,0   | 85,0 mm | 63,0   | 22,0   | 5  | 0        |
| K- 07 25 00 29 | G 1/4 | 0.2 - 6 bar          | 1200           | 40,0   | 85,0 mm | 63,0   | 22,0   | 5  | 0        |
| K- 07 25 00 27 | G 1/4 | 0.5 - 10 bar         | 1200           | 40,0   | 85,0 mm | 63,0   | 22,0   | 5  | 0        |

## Nadomestni deli

|                     |                      |
|---------------------|----------------------|
| K-HALTERBAUSATZ     | Holder               |
| K-SCHALTTAFELMUTTER | Nut                  |
| K-KOPPELPAKET MEHR  | Coupling packet      |
| K-VERSCHLEI-SATZ    | Set of wearing parts |