



# K-3/2-BKR MULTIFIX MINI

Ball valves

**HANSA FLEX**

## Lastnosti

|                         |  |
|-------------------------|--|
| temperatura medija      | max. 60 °C   |
| temperatura okolice     | Max. 60 °C   |
| sprožitev               | Twist knob, rotatable 90°                          |
| pretok                  | 1800 l/min   |
| odzračevalni priključek | Silencer G 1/4                                     |
| tesnilni material       | NBR  |
| ohišje                  | Die-cast zinc                                      |
| meritev pretoka         | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

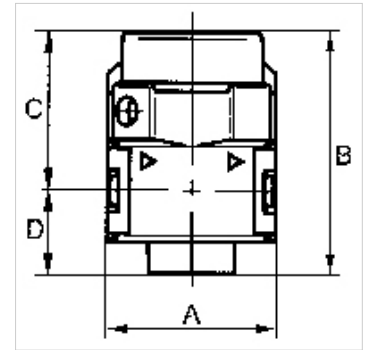

## Navodilo

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.

Drugi podatki na zahtevo.

## Opis

Rotary switch can be turned 90°, lockable, with relief port

## Artikel

| Opis           | Navoj | A<br>(mm) | B       | C<br>(mm) | D<br>(mm) | Velikost |
|----------------|-------|-----------|---------|-----------|-----------|----------|
| K- 07 25 11 56 | G 1/8 | 40,0      | 57,6 mm | 37,6      | 20,0      | 0        |
| K- 07 25 11 57 | G 1/4 | 40,0      | 57,6 mm | 37,6      | 20,0      | 0        |

## Nadomestni deli

|                              |                                     |
|------------------------------|-------------------------------------|
| K-KOPPELPAKET MEHR           | Coupling packet                     |
| K-AUTOMAT ABLASSVENTIL       | Automatic drain valve               |
| K-SCHALLDAE SINTERBR SCHLITZ | Silencers, sintered bronze, slotted |