


K-SCHALTVENTILE 3/2 MULTIFIX MINI

On-off valves (3/2-way valves)

HANSA FLEX

Lastnosti

vstopni tlak	Min. 2 bar, max. 10 bar
temperatura medija	max. 60 °C
temperatura okolice	Max. 60 °C
Električni priključek	Device plug PG 9, type B, EN 175301-803
razred zaščite	IP 65 (P 54) acc. to DIN 40050
pretok	1600 l/min
relativno trajanje vklopa	100 %
odzračevalni priključek	Silencer G 1/4
tesnilni material	NBR
ohišje	Die-cast zinc
meritev pretoka	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

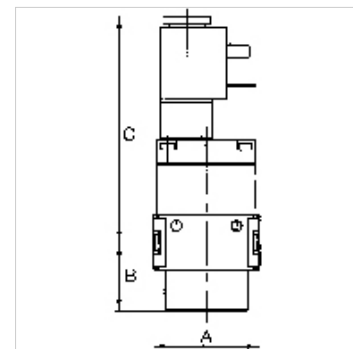

Navodilo

If several devices in the »multiflex-mini« Series are assembled together, the maximum working pressure is 12 bar.

Drugi podatki na zahtevo.

Opis

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is relieved at the same time.

Artikel

Opis	Navoj	magnetna tuljava	A (mm)	B	C (mm)	Velikost
K- 07 25 11 62	G 1/4	230 V AC, 50 Hz	45,0	29,0 mm	96,0	0
K- 07 25 11 63	G 1/4	110 V AC, 50 Hz	45,0	29,0 mm	96,0	0
K- 07 25 11 64	G 1/4	24 V DC	45,0	29,0 mm	96,0	0

Nadomestni deli

K-KOPPELPAKET MEHR	Coupling packet
K-GERAETESTECKER	Coupling socket
K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-MAGNETSPULE MULTIFIX	Solenoid
K-SCHALLDAE SINTERBR SCHLITZ	Silencers, sintered bronze, slotted